

# ROADMAP

## 2023-Q3

COMPLETE ENERGY SOLUTIONS FOR A BETTER TOMORROW

**V-TAC**  
Meaningful Innovation.

# DISCOVER A NEW RANGE OF PRODUCTS.

01




LED FLOODLIGHTS

07



LED STREETLIGHT

09

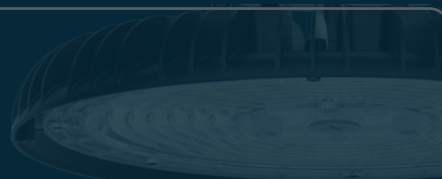

LED HIGHBAY

11




LED PANELS

13



LED WP X-SERIES

18

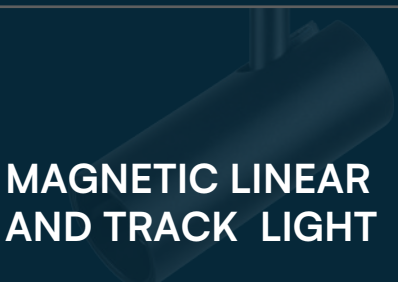

MAGNETIC LINEAR  
AND TRACK LIGHT

17



LED STRIP  
LIGHT

23




WALL & OUTDOOR LIGHTING

35

LED SOLAR  
WALL LIGHTS

42

POWER BANK



46

CAMERA

48

LED TABLE  
LAMP

60

LED DECORATIVE LIGHTS

95

SOLAR PANEL

97

STORAGE  
SOLUTION

101

POWER  
STATIONS

103

105

SOLAR  
INVERTER



111

HEAT PUMP

SOLAR  
CARPORT

# LED LIGHTING



## LED SOLAR FLOODLIGHTS

3M CABLE  
 SMART IR REMOTE  
 FAST CHARGE  
 BATTERY INDICATOR



### BLACK

VT-40W

**6W | 400 LM**

7839-6400K  
 7840-4000K

VT-80W

**10W | 800 LM**

7841-6400K  
 7842-4000K

### WHITE

VT-40W

**6W | 400 LM**

7821-6400K  
 7822-4000K

VT-80W

**10W | 800 LM**

7823-6400K  
 7824-4000K

VT-120W

**15W | 1200 LM**

7843-6400K  
 7844-4000K

VT-180W

**20W | 1800 LM**

7845-6400K  
 7846-4000K

VT-120W

**15W | 1200 LM**

7825-6400K  
 7826-4000K

VT-180W

**20W | 1800 LM**

7827-6400K  
 7828-4000K

VT-240W

**30W | 2600 LM**

7847-6400K  
 7848-4000K

VT-240W

**30W | 2600 LM**

7829-6400K  
 7830-4000K

*Watts for solar panel\**

## LED SOLAR FLOODLIGHT-CUBE LIFEPO4 BATTERY WITH REMOTE CONTROL



VT-411  
**10W | 1500 LM**  
 10313-6400K  
 10314-4000K



VT-432  
**30W | 4800 LM**  
 10311-6400K  
 10310-4000K



- Professional lighting distribution of 120°\*60° beam angle, achieve much bigger lighting area.
- Scientific optical lens make output lighting uniform and comfortable.
- Solar panel is 170° adjustable for maximum solar charging flexibility.
- Lamp bracket is 360° adjustable to easily set desired lighting direction & lighting area.
- Optional work modes by remote control, DIY lighting time & brightness for diverse use.
- Grade-A mono solar panel with laminated glass, big size, 21%+ highly conversion for faster charging,
- Li-ion battery with big capacity, with over-charge & over-discharge protection, safe and durable.
- 5M long connecting cable with IP67 waterproof connector, solid and durable.
- IP65 waterproof.

**LED FLOODLIGHT WITH SOLAR PANEL**



VT-25W  
**12W | 550 LM**  
23018 - 4000K  
10405 - 6400K

VT-40W  
**16W | 1050 LM**  
10406 - 4000K  
10407 - 6400K

VT-60W  
**20W | 1650 LM**  
10408 - 4000K  
10409 - 6400K

VT-100W  
**35W | 2450 LM**  
10410 - 4000K  
23019 - 6400K

VT-200W  
**40W | 3100 LM**  
10413 - 4000K  
10414 - 6400K

VT-200W  
**50W | 4200 LM**  
10415 - 4000K  
10416 - 6400K

*Watts for solar panel\**



**SUPER BRIGHT**  
**135+**  
LM/WATT EFFICIENCY

**LED FLOODLIGHTS**  
BLACK BODY GREY GLASS

VT-4455  
**50W | 5740 LM**  
8845-6400K  
8844-4000K

VT-44101  
**100W | 11480 LM**  
8847-6400K  
8846-4000K

VT-44201  
**200W | 22960 LM**  
8849-6400K  
8848-4000K



**PRO**  
**SERIES**

**05** YEAR  
WARRANTY\*





SUPER BRIGHT  
**160+**  
LM/WATT EFFICIENCY

**02** YEAR  
WARRANTY\*

**LED FLOODLIGHTS**  
BLACK BODY GREY GLASS

VT-44031  
**30W | 4800 LM**  
10353-4000K

VT-44051  
**50W | 8000 LM**  
10354-4000K

VT-44106  
**100W | 16000 LM**  
10355-4000K

VT-44160  
**150W | 24000 LM**  
10362-4000K

VT-44206  
**200W | 32000 LM**  
10365-6500K  
10363-4000K



SUPER BRIGHT  
**185+**  
LM/WATT EFFICIENCY

**02** YEAR  
WARRANTY\*

**LED FLOODLIGHTS**  
BLACK BODY GREY GLASS

VT-4435  
**30W | 5550 LM**  
9891-6400K  
9255-4000K

VT-4456  
**50W | 9250 LM**  
9893-6400K  
9892-4000K


VT-44105  
**100W | 18500 LM**  
9895-6400K  
9894-4000K

VT-44205  
**200W | 37000 LM**  
9897-6400K  
9896-4000K





**LED FLOODLIGHTS**  
BLACK BODY GREY GLASS

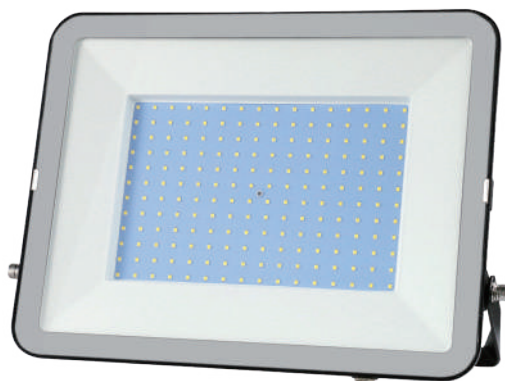

VT-44010  
**10W | 735 LM**  
9898 - 3000K  
9899 - 4000K  
10010 - 6500K

VT-44020  
**20W | 1620 LM**  
10014 - 3000K  
10015 - 4000K  
10016 - 6500K

VT-44030  
**30W | 2505 LM**  
10020 - 3000K  
10021 - 4000K  
10022 - 6500K



VT-44050  
**50W | 4270 LM**  
10026 - 6500K

VT-44206  
**200W | 17540LM**  
10027 - 3000K  
10028 - 4000K  
10029 - 6500K  
WITH 1M CABLE

VT-44300  
**300W | 26390 LM**  
10031 - 4000K  
10032 - 6500K  
WITH 1M CABLE



**LED FLOODLIGHTS**  
WHITE BODY WHITE GLASS



VT-44010  
**10W | 735 LM**  
10011 - 3000K  
10012 - 4000K  
10013 - 6500K

VT-44020  
**20W | 1620 LM**  
10017 - 3000K  
10018 - 4000K  
10019 - 6500K

VT-44030  
**30W | 2505 LM**  
10023 - 3000K  
10024 - 4000K  
10025 - 6500K



VT-44206  
**200W | LM**  
10029 - 4000K  
10030 - 6500K  
WITH 1M CABLE

VT-44300  
**300W | 26390 LM**  
10033 - 4000K  
10034 - 6500K  
WITH 1M CABLE





## LED STREETLIGHT

VT-150030ST

**30W | 3000 LM**

7886 - 4000K

7887 - 6500K

VT-150050ST

**50W | 5000 LM**

7888 - 4000K

7889 - 6500K

VT-150100ST

**100W | 10000 LM**

7890 - 4000K

7891 - 6500K



## LED STREETLIGHT

VT-15035ST

**30W | 2510LM**

10206 - 4000K

10207 - 6500K

VT-15057ST

**50W | 4270LM**

10208 - 4000K

10209 - 6500K

VT-15110ST

**100W | 8700LM**

10210 - 4000K

10211 - 6500K




**SOLAR LED STREETLIGHT WITH REMORTE CONTROL**

VT-15111ST  
**2500 LUMEN**  
10224 - 4000K  
10225 - 6500K

VT-15200ST  
**3000 LUMEN**  
10226 - 4000K  
10227 - 6500K

VT-15300ST  
**3500 LUMEN**  
10228 - 4000K  
10229 - 6500K

|                   |                                 |                                 |                                 |
|-------------------|---------------------------------|---------------------------------|---------------------------------|
| Batteries         | <b>3.2V 30AH</b>                | <b>3.2V 50AH</b>                | <b>3.2V 75AH</b>                |
| Wires             | <b>1+0.5m 1.5mm<sup>2</sup></b> | <b>1+0.5m 1.5mm<sup>2</sup></b> | <b>1+0.5m 2.0mm<sup>2</sup></b> |
| Size              | <b>530*200*50mm</b>             | <b>530*200*50mm</b>             | <b>530*200*50mm</b>             |
| Solar Panel Watts | <b>5V/40W</b>                   | <b>5V/60W</b>                   | <b>5V/70W</b>                   |
| Watts             | <b>20W</b>                      | <b>30W</b>                      | <b>35W</b>                      |

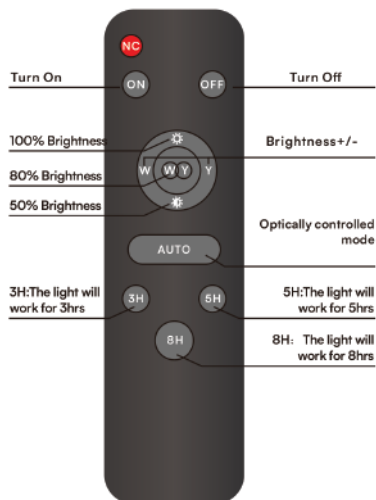

### UFO HIGHBAY

VT-90202  
10467



SUPER BRIGHT  
**160**  
LM/WATT EFFICIENCY



**3 IN 1 CCT SELECT**  
(3000K-4000K-6000K)

**3 IN 1 POWER SELECT**  
(120W-150W-200W)



### LED GARDEN LAMP

VT-10120  
**120W | 12000LM**  
10201 - 4000K



### LED LINEAR HIGBAY

VT-91100  
**100W | 8700 LM**  
7892 - 4000K  
7893 - 6500K



**LED HIGHBAY**

VT-91101

**100W**

10035 - 4000K  
10040 - 6500K

VT-91200

**200W**

10041 - 4000K  
10042 - 6500K



**LED HIGHBAY**

VT-92100

**100W | 10200 LM**

7808 - 4000K  
7809 - 6500K

VT-92150

**150W | 15300 LM**

7810 - 4000K  
7811 - 6500K

VT-92200

**200W | 20400 LM**

7812 - 4000K  
7813 - 6500K

**SUPER BRIGHT**

**120**

LM/WATT EFFICIENCY



**LED HIGHBAY**

VT-90101

**100W | 10000 LM**

10202 - 4000K  
10203 - 6500K

VT-90201

**200W | 20000 LM**

10204 - 4000K  
10205 - 6500K

## LED BACKLIT RECESSED PANEL ROUND



2.5 Inches  
VT-61003

**3W | 330 LM**

7855 - 3000K  
7856 - 4000K  
7857 - 6500K

3.5 Inches  
VT-61006

**6W | 660 LM**

7858 - 3000K  
7859 - 4000K  
7860 - 6500K

5 Inches  
VT-61012

**12W | 1200 LM**

7861 - 3000K  
7862 - 4000K  
7863 - 6500K

8 Inches  
VT-61018

**18W | 980LM**

7864 - 3000K  
7865 - 4000K  
7866 - 6500K

12 Inches  
VT-61024

**24W | 2640 LM**

7867 - 3000K  
7868 - 4000K  
7869 - 6500K

## LED BACKLIT SURFACE MOUNTED PANEL ROUND



3.5 Inches  
VT-60006

**6W | 660 LM**

7870 - 3000K  
7871 - 4000K  
7872 - 6500K

5 Inches  
VT-60012

**12W | 1200 LM**

7873 - 3000K  
7874 - 4000K  
7875 - 6500K

8 Inches  
VT-60018

**18W | 1980LM**

7876 - 3000K  
7877 - 4000K  
7878 - 6500K

12 Inches  
VT-60024

**24W | 2640 LM**

7879 - 3000K  
7880 - 4000K  
7881 - 6500K

## LED BACKLIT RECESSED PANEL SQUARE



2.5 Inches  
VT-61003

**3W | 330 LM**

10477 - 3000K  
10478 - 4000K  
10479 - 6500K

3.5 Inches  
VT-61006

**6W | 660 LM**

10480 - 3000K  
10481 - 4000K  
10482 - 6500K

5 Inches  
VT-61012

**12W | 1200 LM**

10483 - 3000K  
10484 - 4000K  
10485 - 6500K

8 Inches  
VT-61018

**18W | 980LM**

10486 - 3000K  
10487 - 4000K  
10488 - 6500K

12 Inches  
VT-61024

**24W | 2640 LM**

10489 - 3000K  
10490 - 4000K  
10491 - 6500K

## LED BACKLIT SURFACE MOUNTED PANEL SQUARE



3.5 Inches  
VT-60006

**6W | 660 LM**

10492 - 3000K  
10493 - 4000K  
10494 - 6500K

5 Inches  
VT-60012

**12W | 1200 LM**

10495 - 3000K  
10496 - 4000K  
10497 - 6500K

8 Inches  
VT-60018

**18W | 1980LM**

10498 - 3000K  
10499 - 4000K  
10500 - 6500K

12 Inches  
VT-60024

**24W | 2640 LM**

10514 - 3000K  
23023 - 4000K  
10516 - 6500K



**LED WP X-SERIES ECONOMICAL TUBE-120CM**

SUPER BRIGHT  
**120**  
LM/WATT EFFICIENCY

**IP65**  
RATING

120cm  
VT-1253  
**36W | 4320LM**  
10220 - 4000K  
10221 - 6500K

150cm  
VT-1254  
**48W | 5760LM**  
10222 - 4000K  
10223 - 6500K


120cm  
VT-1253S  
**36W | 4320LM**  
10213 - 4000K  
10215 - 6600K



**MICROWAVE SENSOR**  
Auto Sensor Control function  
100% light for 60sec  
20% light for 120secs

**LED GRILL FITTING**

SUPER BRIGHT  
**120**  
LM/WATT EFFICIENCY



120cm  
VT-8340  
**40W | 4800LM**  
8048 - 4000K  
8049 - 6500K

150cm  
VT-8350  
**50W | 6000LM**  
8050 - 4000K  
8054 - 6500K



**IP65**  
RATING


**T8 WP LAMP FITTING 2\*60CM**

VT-12004  
7882 - HERMETIC SEAL  
7883 - METAL HERMETIC SEAL

**T8 WP LAMP FITTING 2\*150CM**

VT-12005  
7884 - HERMETIC SEAL  
7885 - METAL HERMETIC SEAL



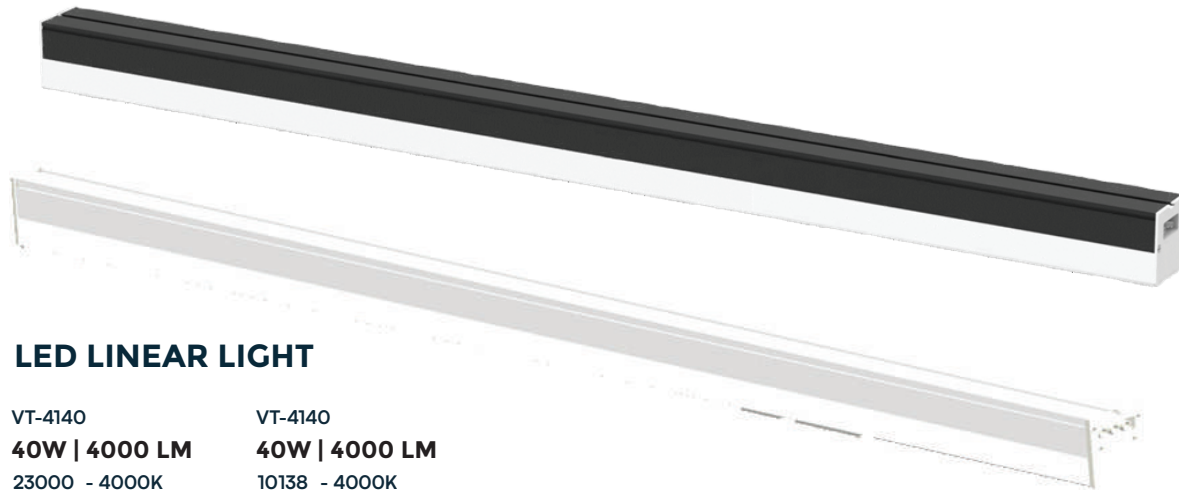

**LED LINEAR LIGHT**

VT-4140

**40W | 4000 LM**

23000 - 4000K

10137 - 6500K

BLACK

VT-4140

**40W | 4000 LM**

10138 - 4000K

23001 - 6500K

WHITE

**ACCESSORIES FOR LINEAR LIGHTS**




**X CONNECTOR**

**10W**

10140 - 4000K

10141 - 6400K




**X CONNECTOR**

**10W**

10142 - 4000K

10143 - 6400K



**T CONNECTOR**

**8.5W**

23002 - 4000K

10170 - 6400K



**X CONNECTOR**

**8.5W**

10171 - 4000K

10172 - 6400K



**L CONNECTOR**

**6.5W**

10173 - 4000K

10174 - 6400K



**L CONNECTOR**

**6.5W**

10175 - 4000K

10176 - 6400K



**POWER CABLE**

10177 - 0.3m

10178 - 1.5m



**POWER CABLE**

10179 - 0.3m

10180 - 1.5m



**POWER CABLE WITH 2 PLUGS**

Black  
10181

White  
10182



**SUSPENDED KIT**

10183



**RECESSED KIT**

10184



**SURFACE MOUNTED KIT**

10185


**LED LINEAR HANGING SUSPENSION LIGHT**



VT-7-44  
**40W**  
10468 - 3-in-1 Black Body  
10469 - 3-in-1 White Body



**ALSO AVAILABLE IN  
WHITE BODY**

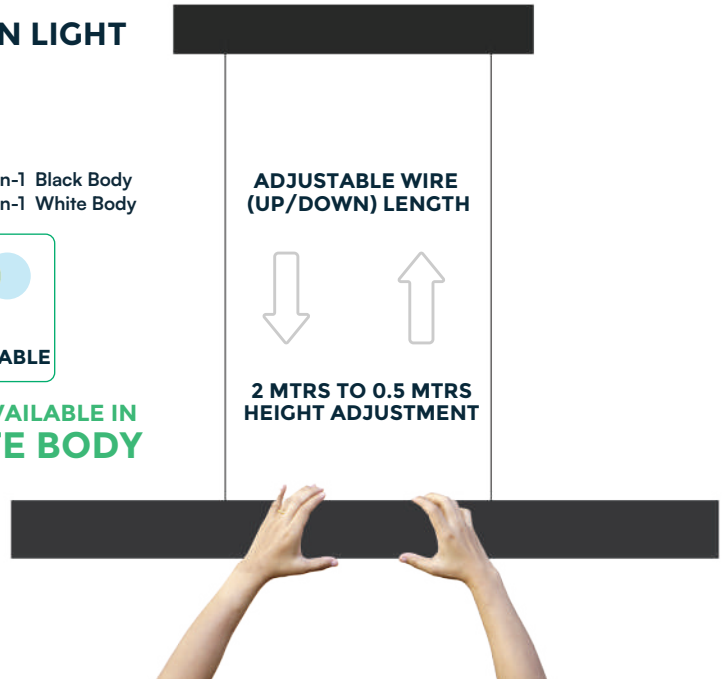

**ADJUSTABLE WIRE  
(UP/DOWN) LENGTH**



**2 MTRS TO 0.5 MTRS  
HEIGHT ADJUSTMENT**




**ALSO AVAILABLE IN  
WHITE BODY**

**LED COB DOWN LIGHT**

VT-2512  
**12W**  
10578 - 3-in-1 Black Body  
10579 - 3-in-1 White Body

VT-2520  
**20W**  
10580 - 3-in-1 Black Body  
10581 - 3-in-1 White Body

VT-2532  
**30W**  
10582 - 3-in-1 Black Body  
10583 - 3-in-1 White Body



**FILAMENT VASE SHAPE  
BLACK BIG BULB**

VT-2264  
**4W**  
8056



140x200mm

**FILAMENT COBBLE SHAPE  
BLACK BIG BULB**

VT-2265  
**4W**  
8057



220x225mm



190x275mm

**FILAMENT APPLE SHAPE  
BLACK BIG BULB**

VT-2263  
**4W**  
8064



**LED BULKHEAD**

VT-8095  
**12W | 1100**  
10195 - 3000K  
10196 - 4000K  
10197 - 6500K

VT-8096  
**18W | 1620**  
10198 - 3000K  
10199 - 4000K  
10200 - 6500K



### LED STRIP LIGHT

VT-2835 120


**8W**

23024 - 3000K

23025 - 4000K

23026 - 6500K

- DOUBLE PCB
- Power: 8W/M. DC 24V
- 5M/Roll



### LED STRIP LIGHT

VT-3535 120

**12W**

10556 - RGB

- DOUBLE PCB
- 8MM
- Power: 12W/M. DC 24V
- 5M/Roll





### LED COB STRIP LIGHT

VT-COB 560

**18W**

10555 - 3 IN 1 — CCT Changeable

- DOUBLE PCB
- 8MM
- Power: 18W/M. DC 24V
- 5M/Roll

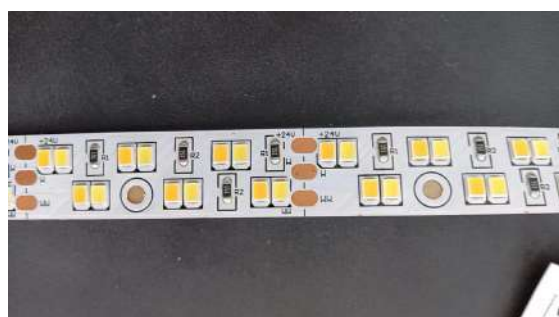


### LED STRIP LIGHT

VT-2835 240

**21W**

10554 - 3 IN 1 — CCT Changeable

- DOUBLE PCB
- 15MM
- Power: 21W/M. DC 24V
- 5M/Roll



# Free Movement without Limitation



## MAGNETIC TRACK INTRODUCTION

DC 48V safety voltage  
No contact hazard



## Magnetic Installed Easily and Firm



Safety Buckle





## MAGNETIC LINEAR SPOT LIGHT - SLIM

VT-4225

**5W**

10233 - 4000K

10234 - 3000K

10235 - 6400K



## MAGNETIC LINEAR SPOT LIGHT - SLIM

VT-4212

**12W**

10236 - 4000K

10237 - 3000K

10238 - 6400K



## MAGNETIC LINEAR SPOT LIGHT - SLIM

VT-4222

**22W**

10239 - 4000K

10240 - 3000K

10241 - 6400K



## MAGNETIC LINEAR SPOT LIGHT - SLIM

VT-4211

**10W**

10242 - 4000K

10243 - 3000K

10244 - 6400K

VT-4218

**18W**

10245 - 4000K

10246 - 3000K

10247 - 6400K

VT-42022

**22W**

10248 - 4000K

10249 - 3000K

10250 - 6400K



## MAGNETIC LINER LIGHT - L SHAPE

VT-42025

**25W**

10266 - 4000K

10267 - 3000K

10268 - 6400K



## SLIM MAGNETIC LINEAR SPOT LIGHT - ADJUSTABLE ANGLE

VT-4205

**5W**

10257 - 4000K

10258 - 3000K

10259 - 6400K

VT-42012

**12W**

10260 - 4000K

10261 - 3000K

10262 - 6400K



**MAGNETIC PENDANT LIGHT**

VT-4214  
**14W**  
 10263 - 4000K  
 10264 - 3000K  
 10265 - 6400K



**MAGNETIC TRACK LIGHT - SLIM**

|               |               |
|---------------|---------------|
| VT-42010      | VT-4221       |
| <b>10W</b>    | <b>20W</b>    |
| 10251 - 4000K | 10254 - 4000K |
| 10252 - 3000K | 10255 - 3000K |
| 10253 - 6400K | 10256 - 6400K |



**3-IN-1  
COB LED TRACKLIGHT**

Black  
 VT-47030  
**30W**  
 8078 3-lin-1

Black  
 VT-47050  
**50W**  
 8842 3-lin-1

White  
 VT-47030  
**30W**  
 8142 3-lin-1

White  
 VT-47050  
**50W**  
 8843 3-lin-1







### LED SMART MAGNETIC TRACK LIGHT FLEXIBLE TUBE

1 METER  
VT-42112-S  
**12W**  
10275 - 3-IN-1

2 METER  
VT-42024-S  
**24W**  
10276 3-IN-1



### LED MAGNETIC TRACK LIGHT-FLEXIBLE TUBE

1 METER  
VT-42112  
**12W**  
10277 - 3000K  
10278 - 4000K

1 METER  
VT-42024  
**24W**  
10279 - 3000K  
10280 - 4000K



### LED TRACKLIGHT

VT-4633  
**30W**  
10371 - 3-IN-1



### LED TRACK LIGHT

VT-4235  
**35W**  
10281 - 4000K

# WALL & OUTDOOR LIGHTING



**BOLLARD GARDEN FITTING**



VT-1184  
10471

- IP44
- E27 Max 18W
- Smoke Plastic
- Stainless steel
- Size:φ76mmx119x450mm



VT-1185  
10472

- IP44
- E27 Max 18W
- Smoke Plastic
- Stainless steel
- Size:φ76mmx119x450mm



**WALL LIGHT  
DIAGONAL ANGLE**

VT-1183  
10470

- IP44
- E27 Max 18W
- Smoke Plastic
- Stainless steel
- Size:φ76mmx365x236mm

**UP/DOWN WALL LIGHT  
ADJUSTABLE ANGLE**



VT-1186  
2 x 2.6W  
BLACK BODY  
10473 - 3000K  
23049 - 4000K

WHITE BODY  
10474 - 3000K  
23050 - 4000K

- IP44
- LED 6.5W 500LM
- Ra >80
- Die Cast Aluminum+Glass
- Size:172X105X253mm



**BOLLARD  
GARDEN LIGHT**

VT-1187  
2 x 2.6W

BLACK BODY  
10475 - 3000K  
23051 - 4000K

WHITE BODY  
10476 - 3000K  
23052 - 4000K

- IP44
- LED 6.5W 500LM
- Ra >80
- Die Cast Aluminum+Glass
- Size:129X159X1000mm



Black  
VT-402  
**2W**  
10286 - 3000K  
10287 - 4000K

White  
VT-402  
**2W**  
10288 - 3000K  
10289 - 4000K



**LED WALL MOUNTED SPOT LIGHT**

Black  
VT-412-M  
**2W**  
10290 - 3000K  
10291 - 4000K

White  
VT-412  
**2W**  
10292 - 3000K  
10293 - 4000K



**WALL MOUNTED GU10 SPOT LIGHT**

Black  
VT-429  
10294

White  
VT-429  
10295



**LED SPOT LIGHT**

VT-1018


**18W**

10301 - 3000K

10302 - 4000K

10303 - 6400K

**SUITABLE FROM 3 TO 18W**

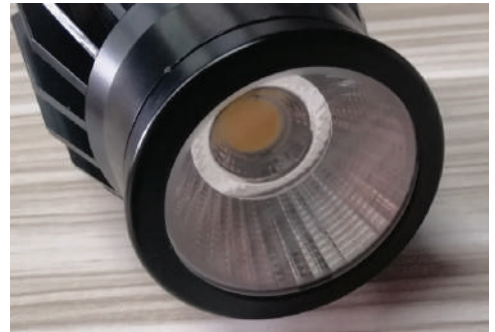

**SPOTLIGHT FITTINGS**



Round  
VT-438  
10296

Ø87x31mm



Square  
VT-443  
10297

88x88mm



88x175mm

**2 HEAD SPOTLIGHT FITTINGS**

VT-439  
10298



88x261mm

**3 HEAD SPOTLIGHT FITTINGS**

VT-441  
10299



175x175mm

**4 HEAD SPOTLIGHT FITTINGS**

VT-442  
23003



**LED STEP LIGHT**

VT-1128  
**3W**  
10376 - 3000K




**LED STEP LIGHT**

VT-1130  
**3W**  
10378 - 3000K



**LED STEP LIGHT**

VT-1129  
**5W**  
10377 - 3000K

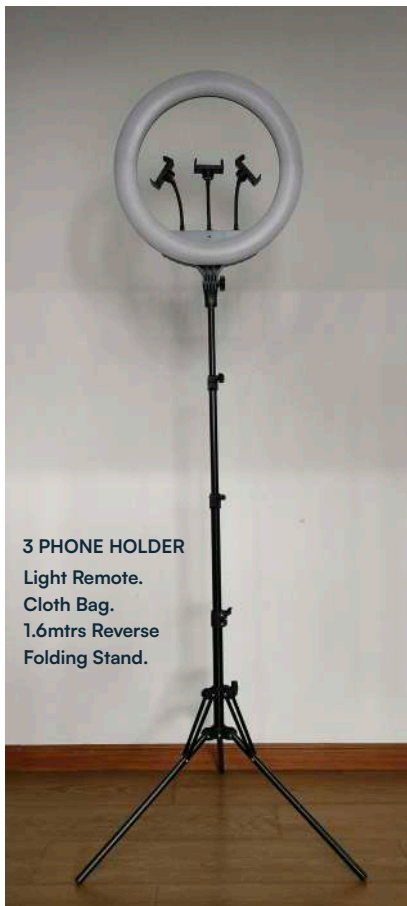

**18 INCHS  
LED RING LIGHT**

**55W | 5500 LM**

VT-45055  
23047 - 3200K-5500K  
N.W: 1.55kg  
LED beads: 416pcs  
Input: AC 220~240V, 50/60 Hz  
Adapter power: 100v-240v  
Outer diameter : 45.5cm  
Material: ABS  
RA: >90



3 PHONE HOLDER  
Light Remote.  
Cloth Bag.  
1.6mtrs Reverse  
Folding Stand.



**10 INCHS  
LED RING LIGHT  
7W | 550 LM**

VT-45010  
23048 - 3200K-5500K  
N.W: 552g  
LED beads: 120pcs  
Input: DC 5V  
USB power: DC 3.7-5V  
Outer diameter : 26cm  
Inner diameter : 20.5cm  
Thickness:2.5cm  
Material: ABS  
RA: >90





**IP68**  
RATING

**LED GLASS POOL LIGHT**

VT-12118  
**18W | 2000 LM**  
8024 - 6500K

VT-12125  
**25W | 2850LM**  
8025 - 6500K

VT-12135  
**35W | 4100 LM**  
8026 - 6500K

**MINI GU10 UNDERGROUND FITTING**

**GU10 SURFACE FITTING**



10374



10375



10379-WHITE



10380-BLACK



VT-1119  
10372 (88\*75\*245mm)

**MINI GU10 GARDEN SPIK**



VT-1126  
10373 (105\*75\*245mm)



**LED LAMP**

VT-1160  
**12W**  
 23021 - 3000K  
 10426 - 4000K  
 (D150\*H800)  
 ANTHRACITE BODY

**IP65**  
**RATING**



**LED LINEAR WALL LIGHT**

VT-1173  
**10W**  
 BLACK BODY  
 10427 - 3000K  
 10428 - 4000K  
 ANTHRACITE BODY  
 10427 - 3000K  
 10428 - 4000K  
 510\*60\*50mm

VT-1176  
**20W**  
 BLACK BODY  
 10431 - 3000K  
 23022 - 4000K  
 ANTHRACITE BODY  
 10434 - 3000K  
 10435 - 4000K  
 1010\*60\*50mm

VT-1178  
**28W**  
 BLACK BODY  
 10436 - 3000K  
 10437 - 4000K  
 ANTHRACITE BODY  
 10438 - 3000K  
 10439 - 4000K  
 1410\*60\*50mm



**LED WALL LIGHT**

VT-1179  
**6W**  
 BLACK BODY  
 10445 - 3000K  
 10446 - 4000K  
 WHITE BODY  
 10443 - 3000K  
 10444 - 4000K

**IP65**  
**RATING**





**LED WALL LIGHT**

VT-1180

**5W**

BLACK BODY

10448 - 3000K+4000K

WHITE BODY

10447 - 3000K+4000K

**IP65**  
RATING



**GARDEN WALL LIGHT**

VT-1193

**1W**

23032 - 3000K - BLACK

23033 - 3000K - DARK GREY

**IP65**  
RATING



**LED WALL LIGHT**

VT-708

**8W**

10282 - 3000K

10283 - 4000K



**LED WALL LIGHT**

VT-732

**8W**

10284 - 3000K

10285 - 4000K



**LED OUTDOOR  
WALL LIGHT**

VT-1192

**14W**

10564 - 3000K

23027 - 4000K

SIZE: L16\*W16.5\*H16.4MM

**IP65  
RATING**



**LED OUTDOOR  
WALL LIGHT**

VT-1189

**6W**

10559 - 3000K

10560 - 4000K

SIZE: W141\*D65\*H200MM

**IP65  
RATING**




**E14 OUTDOOR  
WALL LAMP  
HOLDER**

VT-1190

10561

SIZE: W200\*D168\*H350MM

**IP65  
RATING**

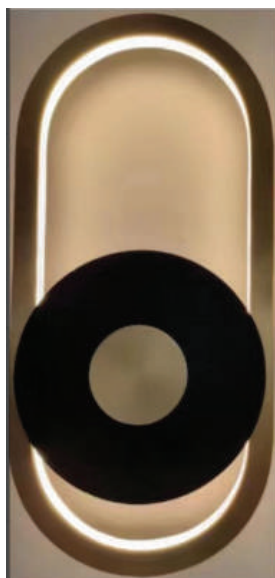

**LED OUTDOOR  
WALL LIGHT**

VT-1191

**15W**

10562 - 3000K

10563 - 4000K

SIZE: L33\*W15\*H4.4MM

**IP65  
RATING**



**LED OUTDOOR  
WALL LIGHT**


VT-1188

**20W**

10558 - 3000K

SIZE: W200\*D50\*H400 MM


**IP65  
RATING**

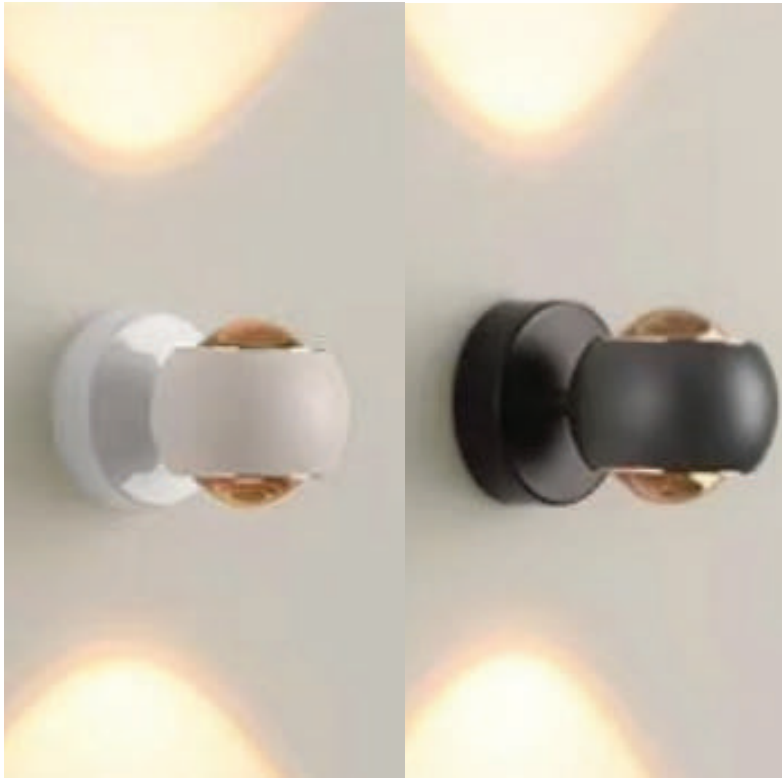

**LED WALL LIGHT 2 WAY**

VT-7504  
**2\*5W**


|               |               |
|---------------|---------------|
| BLACK BODY    | WHITE BODY    |
| 23007 - 3000K | 23008 - 3000K |

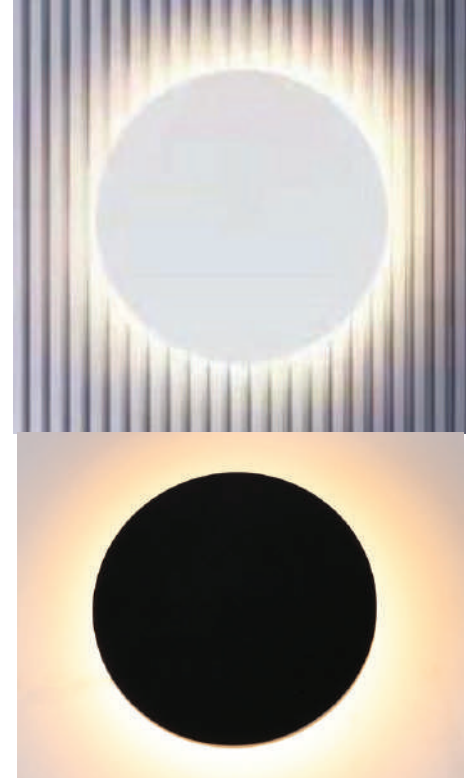

**LED WALL LIGHT**

VT-83012  
**12W**


|               |              |
|---------------|--------------|
| BLACK BODY    | WHITE BODY   |
| 7853 - 3 IN 1 | 7854 :3 IN 1 |



**LED COB 2 WAY WALL LIGHT**

VT-2502  
**2W**


|               |
|---------------|
| BLACK BODY    |
| 10584 - 3000K |
| 10586 - 4000K |
| WHITE BODY    |
| 10585 - 3000K |
| 10587 - 4000K |

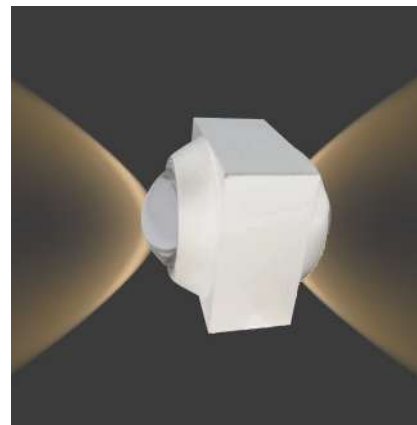

**LED COB 2 WAY WALL LIGHT**

VT-2503  
**2W**

|               |
|---------------|
| BLACK BODY    |
| 23028 - 3000K |
| 23030 - 4000K |
| WHITE BODY    |
| 23029 - 3000K |
| 23031 - 4000K |

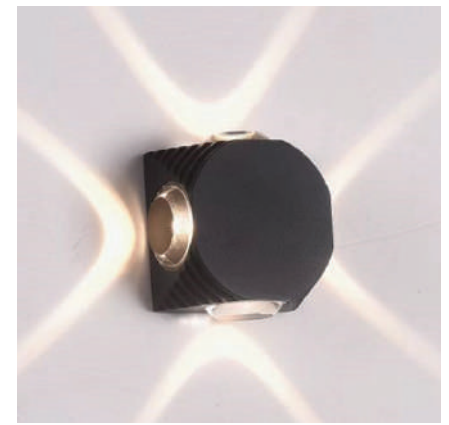

**LED COB 4 WAY WALL LIGHT**

VT-2544  
**4W**

|               |
|---------------|
| BLACK BODY    |
| 10588 - 3000K |
| 10590 - 4000K |
| WHITE BODY    |
| 10589 - 3000K |
| 10591 - 4000K |



**WALL LAMP-E27**

VT-1223  
11823

SIZE: 325\*200\*250 MM  
IP: IP44



**WALL LAMP-E27**

VT-1224  
11824

SIZE: 240\*200\*365 MM  
IP: IP44



**CEILING HANGING LAMP-E27**

VT-1226    SIZE: 200\*200\*870 MM  
11825    IP: IP44



**STAND LAMP-E27**

VT-1230    SIZE: 200\*200\*330MM  
11826    IP: IP44



**STAND LAMP-E27**

VT-1231  
11827

SIZE: 200\*200\*970MM  
IP: IP44

**WALL LAMP - E27**

VT-1158  
10422

SIZE: 305\*250\*340MM  
IP: IP44





**WALL LAMP - E27**

VT-1149  
10417

SIZE: 95\*115\*230 MM  
IP: IP44

VT-1149  
23020



**WALL LAMP - E27**

VT-1150  
10420

SIZE: 200\*280\*260 MM  
IP: IP44



**STAND LAMP E27**

VT-1232  
11828

SIZE: 515\*200\*1990 MM  
IP: IP44



VT-1157  
10421

SIZE: 340\*200\*1050mm  
IP: IP44



VT-1159  
10423

SIZE: Ø250\*980 mm  
IP: IP44

# SOLAR LIGHTING





**LED SOLAR WALL LIGHT**

VT-425  
15W  
23004 - 6000K+4000K - BLACK



**LED SOLAR PILAR LIGHT**

VT-426  
15W  
23005 - 6000K+4000K - BLACK



**LED SOLAR PATH LIGHT**


VT-413  
15W  
23006 - 6000K+4000K - BLACK





**LED SOLAR YARD LIGHT**

VT-414  
**15W**  
 10315 6000K+4000K - BLACK  
 10316 6000K+4000K - WHITE

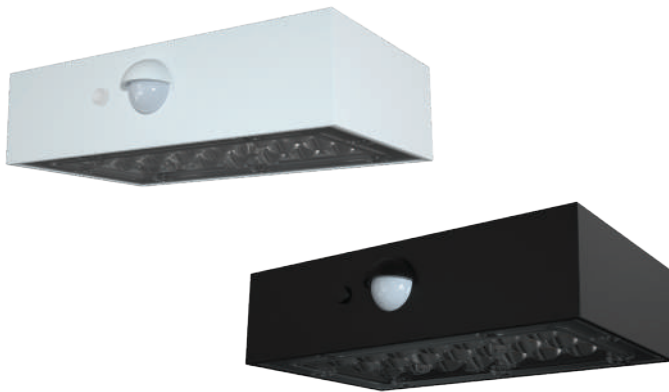

**LED SOLAR WALL LIGHT**

|                            |                        |
|----------------------------|------------------------|
| VT-403                     | VT-406                 |
| <b>3W</b>                  | <b>6W</b>              |
| 10305 - 4000K+3000K BLACK  | 10307 - 4000K - BLACK  |
| 10306 - 4000K+3000K WHITEK | 10308 - 4000K - WHITEK |

**LED SOLAR WALL LIGHT**

VT-422  
**2W**  
 10309 - 4000K



**HANGING**      **WALL MOUNT**  
**2-IN-1 INSTALLATION**





SOLAR WALL LAMP



VT-1138  
**1W**  
10384 -3000K - BLACK  
10395 -3000K - WHITE



VT-1139  
**1W**  
23012 -3000K - BLACK  
23013 -3000K - WHITE



VT-1140  
**1W**  
23014 -300K



MICROWAVE  
SENSOR



VT-1145  
**1W**  
10399 -300K



VT-1147  
**5.5W**  
10402 - 3000K



PIR MOTION  
SENSOR



VT-1147  
**5.5W**  
23016 - 3000K



**SOLAR WALL LAMP**

VT-1148  
**2.5W**  
23017 - 3000K



**SOLAR SPIKE LAMP**

VT-1146  
**2W**  
23015 - 3000K

**LED SOLAR BOLLARD LAMP**

VT-1137  
**2.W**  
23011 - 3000K





2IN1



SOLAR LED GARDEN LIGHT-2-1N-1

VT-4102  
2W  
10304 3-IN-1

Charging Time: 6-8 Hours  
Working Time: 10-12 Hours



SOLAR WALL LIGHT-E27

VT-1136  
2.5W  
23010 - 3000K



SOLAR BOLLARD LIGHT-E27

VT-1134  
2.5W  
23009 - 3000K



### SOLAR STRIP LIGHT


VT-2835 60

1.2W

23044 - 3000K

23045 - 4000K

23046 - RGB



(1) Hanging

**2 IN 1  
INSTALLATION**



(2) Spike



Solar Panel Power: 1.2W  
Lamp Power: 1.8W

### SOLAR STRING LIGHT(12M) WITH BULB & REMOTE

VT-70512

0.5W/G50 BULB

7804 - 3000K

- High power solar panel
- 3.7V Lithium rechargeable battery
- 15pcs filament head lanterns
- Material: plastic and metal



### SOLAR STRING LIGHT(15M) WITH BULB

VT-715S


3W/ST64 BULB

23034- 3000K

- 2 Battery:2XPCS
- 3 Led:15 pcs



# V-TAC Digital

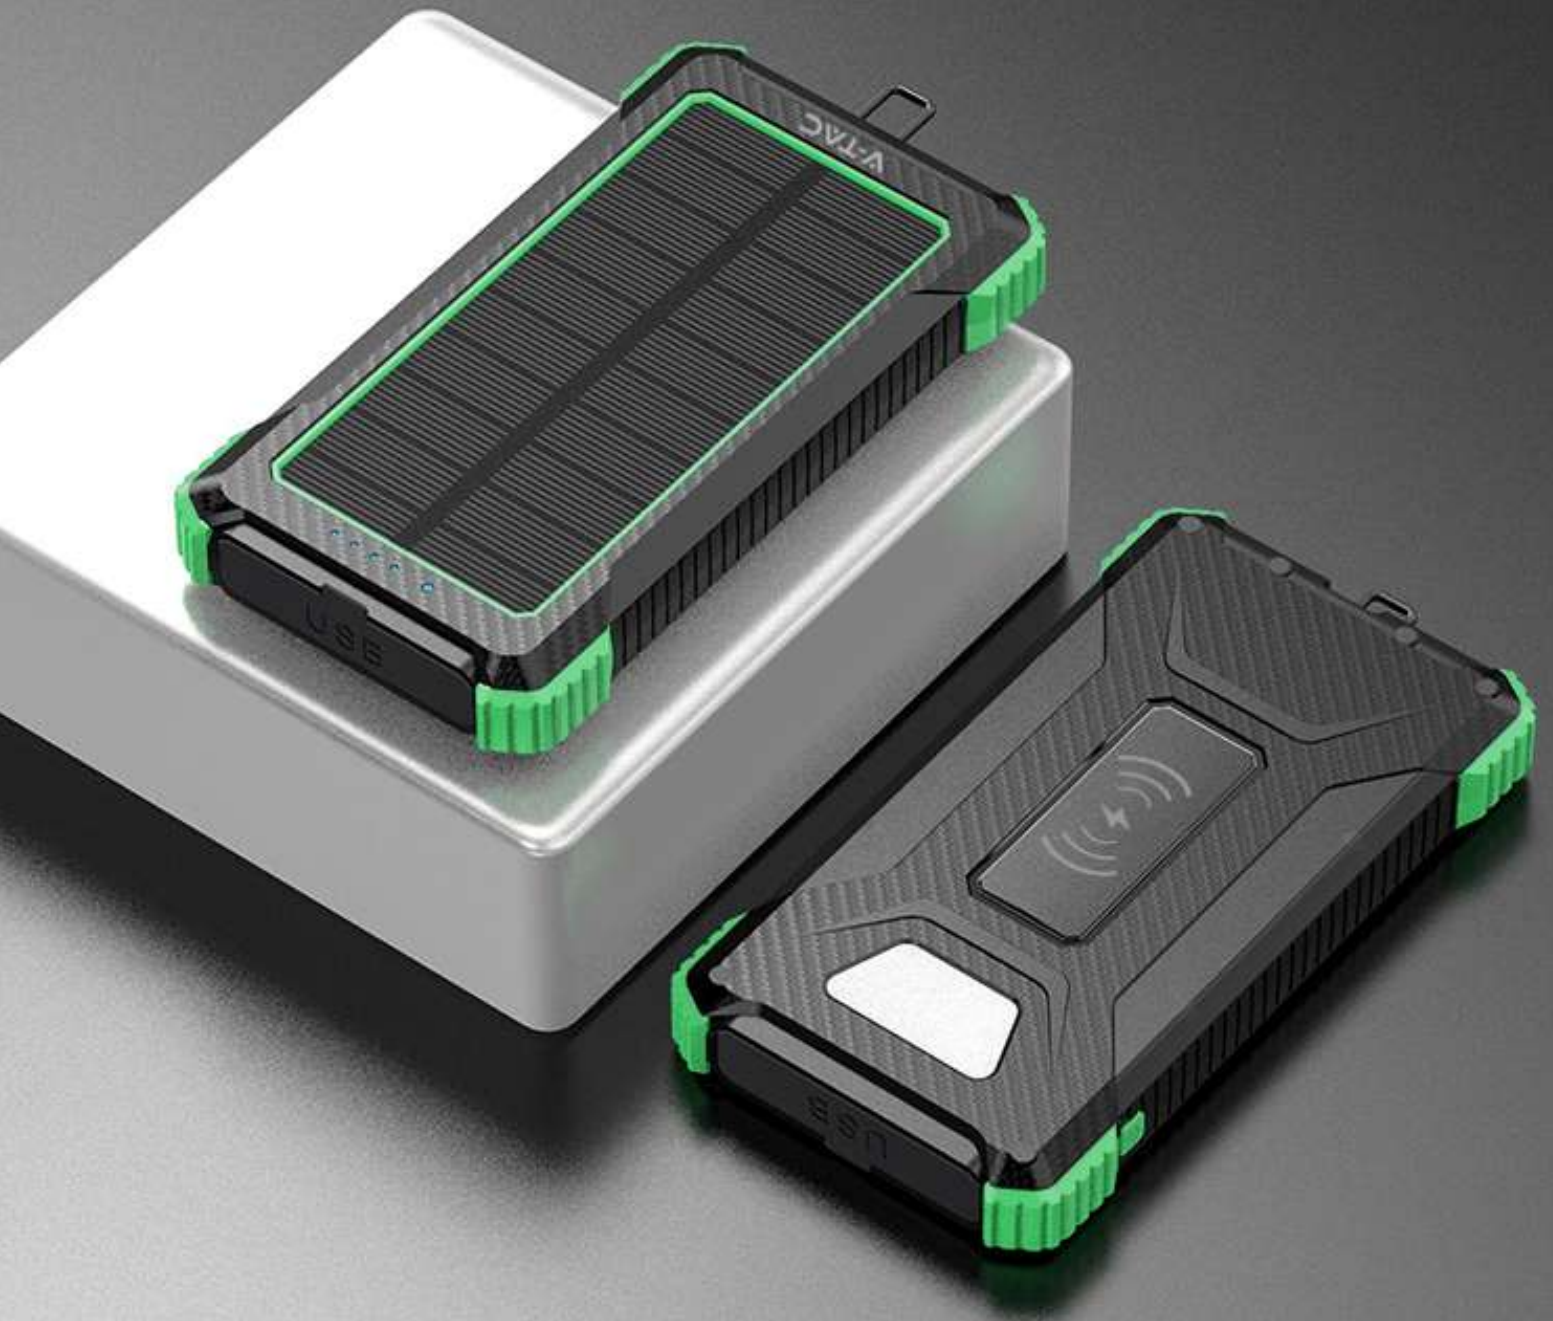

**FAST CHARGER  
POWER BANK**

VT-10000  
7831 - BLACK  
7832 - WHITE

**10000mAh**  
CAPACITY



**22.5W**  
**PD**  
POWER DELIVERY

---

**TYPE C**  
INPUT/OUTPUT

---

**FAST**  
CHARGE

---


**2 USB**  
OUTPUT



**FAST CHARGER  
POWER BANK**

VT-10005  
7833 - BLACK  
7834 - WHITE

**10000mAh**  
CAPACITY

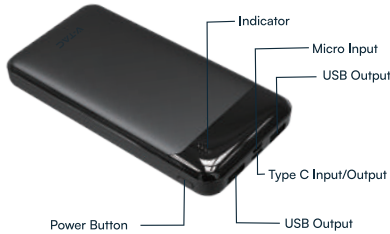

**22.5W**  
**PD**  
POWER DELIVERY

---

**TYPE C**  
INPUT/OUTPUT

---

**FAST**  
CHARGE

---


**2 USB**  
OUTPUT





**SOLAR WIRELESS  
CHARGER POWER BANK**

VT-11111  
7835 - BLACK

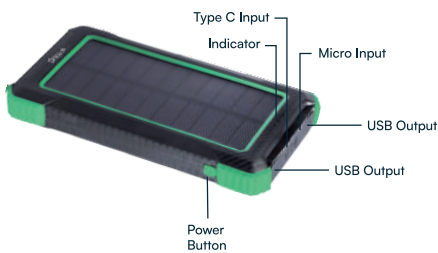**10000mAh**  
CAPACITY



  
OUTDOOR

  
5W WIRELESS

---

**TYPE C**  
INPUT

---

**FAST**  
SOLAR INPUT

---


**2 USB**  
OUTPUT



### SOLAR WIRELESS CHARGER POWER BANK

VT-33333  
7836 - BLACK

**30000mAh**  
CAPACITY

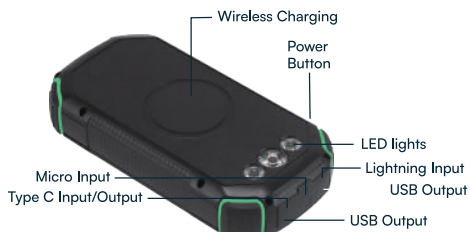

**20W**  
**PD**  
POWER DELIVERY

WIRELESS CHARGING

10W WIRELESS

**TYPE C**  
INPUT/OUTPUT

**FAST**  
CHARGE


**2 USB**  
OUTPUT



### ULTRA THIN-MAG SAFE ALUMINUM ALLOY MAGNETIC POWER BANK

VT-100011  
7849 - SPACE GREY

**10000mAh**  
CAPACITY

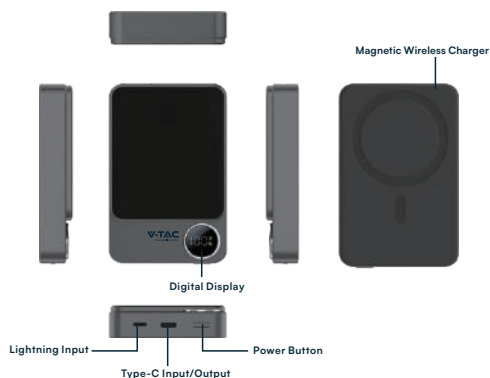

**WIRELESS**  
MAGNETIC SUCTION CHARGING

**20W**  
**PD**  
POWER DELIVERY

**TYPE C**  
INPUT/OUTPUT


**LIGHTNING**  
INPUT



### ULTRA THIN-MAG SAFE ALUMINUM ALLOY MAGNETIC POWER BANK

VT-50005  
7850 - SPACE GREY  
7851 - PURPLE

**5000mAh**  
CAPACITY

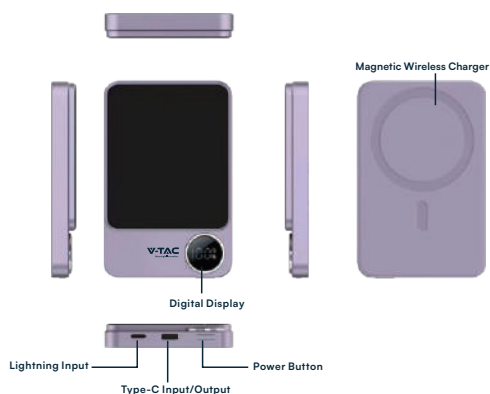

**WIRELESS**  
MAGNETIC SUCTION CHARGING

**20W**  
**PD**  
POWER DELIVERY

**TYPE C**  
INPUT/OUTPUT

**LIGHTNING**  
INPUT



### MAGNETIC WIRELESS POWER BANK WITH METAL RING

VT-3529  
23038 - BLACK  
23039 - WHITE  
23040 - GREY

10000mAh  
CAPACITY



15W WIRELESS

TYPE C  
INPUT/OUTPUT

FAST  
CHARGE

USB  
OUTPUT



### POWER BANK

VT-3527  
23035 - SILVER  
23036 - BLACK  
23037 - GREY

10000mAh  
CAPACITY

TYPE C  
INPUT/OUTPUT

FAST  
CHARGE

2 USB  
OUTPUT



## 4G HD SMART SOLAR ENERGY PTZ CAMERA WITH SENSOR

VT-11024-4G  
 11615 - BLACK  
 11616 - White

## WIFI HD SMART SOLAR ENERGY PTZ CAMERA WITH SENSOR

VT-11024-WiFi  
 11617 - BLACK  
 11618 - White



360°  
VR



BUILT-IN  
BATTERY



PIR  
DETECTION



VOICE  
MONITOR



FULL COLOR  
NIGHT VISION

Scan to download the APP

Android



iOS



- Ultra-low power standby, quick wake up in 0.2 seconds
- PIR sensor
- High-performance ISP and 1/2.7" progressive sensor,
- Built-in microphone and loudspeaker, support two way audio
- No need extra power
- No need complicated cabling
- 365 days/24 hours uninterrupted monitoring
- Easy installation



# DECORATIVE LIGHTING

## V-TAC

Meaningful Innovation.





**VT-1040**

SKU 7894

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 50 Lm                  |
| BEAM ANGLE                       | 180°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | PS                     |
| UNIT COLOUR                      | Transparent            |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 160x250mm              |



**VT-1041**

SKU 7895

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 55 Lm                  |
| BEAM ANGLE                       | 120°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal                  |
| UNIT COLOUR                      | Black                  |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 120x220mm              |



**VT-1041**

SKU 7896

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 55 Lm                  |
| BEAM ANGLE                       | 120°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal                  |
| UNIT COLOUR                      | White                  |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 120x220mm              |



**VT-1041**

SKU 7897

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 55 Lm                  |
| BEAM ANGLE                       | 120°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>(Not included) |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal                  |
| UNIT COLOUR                      | Champagne Gold         |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 120x220mm              |



**VT-1047**

SKU 7898

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 3W                     |
| LUMENS                           | 200 Lm                 |
| BEAM ANGLE                       | 120°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>(Not included) |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal                  |
| UNIT COLOUR                      | Black                  |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 150x250mm              |



**VT-1047**

SKU 7899

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 3W                     |
| LUMENS                           | 200 Lm                 |
| BEAM ANGLE                       | 120°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>(Not included) |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal                  |
| UNIT COLOUR                      | White                  |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 150x250mm              |



**VT-1047**

SKU 7937

**TECHNICAL DATA**

|                                  |                        |
|----------------------------------|------------------------|
| WATTS                            | 3W                     |
| LUMENS                           | 200 Lm                 |
| BEAM ANGLE                       | 120°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal                  |
| UNIT COLOUR                      | Champagne Gold         |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 150x250mm              |



**VT-1048**

SKU 7938

**TECHNICAL DATA**

|                                  |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 55 Lm                  |
| BEAM ANGLE                       | 180°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | French Gold            |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 135x265mm              |



**VT-1048**

SKU 7939

**TECHNICAL DATA**

|                                  |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 55 Lm                  |
| BEAM ANGLE                       | 180°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | Chrome                 |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 135x265mm              |



**VT-1049**  
SKU 7940

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 100 Lm                 |
| BEAM ANGLE                       | 300°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | Black                  |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 150x300mm              |



**VT-1049**  
SKU 7941

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 100 Lm                 |
| BEAM ANGLE                       | 300°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | White                  |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 150x300mm              |



**VT-1049**  
SKU 7942

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 100 Lm                 |
| BEAM ANGLE                       | 300°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | Violet                 |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 150x300mm              |



**VT-1049**

SKU 7943

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 100 Lm                 |
| BEAM ANGLE                       | 300°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | Champagne gold         |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 150x300mm              |



**VT-1049**

SKU 7944

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 100 Lm                 |
| BEAM ANGLE                       | 300°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | Gery                   |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 150x300mm              |



**VT-1049**

SKU 7945

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 100 Lm                 |
| BEAM ANGLE                       | 300°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | Sand Brown             |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 150x300mm              |



**VT-1051**

SKU 7949

| TECHNICAL DATA                                  |                        |
|---|------------------------|
| WATTS   | 3W                     |
| LUMENS  | 200 Lm                 |
| BEAM ANGLE                                      | 120°                   |
| INPUT POWER                                     | 5V, 1A                 |
| ADAPTER OUTPUT<br><small>[Not included]</small> |                        |
| IP RATING                                       | IP20                   |
| BATTERY   | Lithium DC, 5V Battery |
| BATTERY CAPACITY                                | 1800 mAh               |
| CHARGING TIME                                   | 2-3H                   |
| WORKING TIME                                    | 6-8H                   |
| TOUCH DIMMING LEVEL                             |                        |
| MATERIAL  | Metal                  |
| UNIT COLOUR                                     | Grey                   |
| CABLE LENGTH                                    | 1 Meter [Type C]       |
| DIMENSION                                       | 180x240mm              |



**VT-1051**

SKU 7947

| TECHNICAL DATA                                  |                        |
|---|------------------------|
| WATTS   | 3W                     |
| LUMENS  | 200 Lm                 |
| BEAM ANGLE                                      | 120°                   |
| INPUT POWER                                     | 5V, 1A                 |
| ADAPTER OUTPUT<br><small>[Not included]</small> |                        |
| IP RATING                                       | IP20                   |
| BATTERY   | Lithium DC, 5V Battery |
| BATTERY CAPACITY                                | 1800 mAh               |
| CHARGING TIME                                   | 2-3H                   |
| WORKING TIME                                    | 6-8H                   |
| TOUCH DIMMING LEVEL                             |                        |
| MATERIAL  | Metal                  |
| UNIT COLOUR                                     | Black                  |
| CABLE LENGTH                                    | 1 Meter [Type C]       |
| DIMENSION                                       | 180x240mm              |



**VT-1051**

SKU 7948

| TECHNICAL DATA                                  |                        |
|---|------------------------|
| WATTS   | 3W                     |
| LUMENS  | 200 Lm                 |
| BEAM ANGLE                                      | 120°                   |
| INPUT POWER                                     | 5V, 1A                 |
| ADAPTER OUTPUT<br><small>[Not included]</small> |                        |
| IP RATING                                       | IP20                   |
| BATTERY   | Lithium DC, 5V Battery |
| BATTERY CAPACITY                                | 1800 mAh               |
| CHARGING TIME                                   | 2-3H                   |
| WORKING TIME                                    | 6-8H                   |
| TOUCH DIMMING LEVEL                             |                        |
| MATERIAL  | Metal                  |
| UNIT COLOUR                                     | White                  |
| CABLE LENGTH                                    | 1 Meter [Type C]       |
| DIMENSION                                       | 180x240mm              |





**VT-1052**

SKU 7985


| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 3W                     |
| LUMENS                           | 200 Lm                 |
| BEAM ANGLE                       | 120°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal                  |
| UNIT COLOUR                      | Black                  |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 115x300mm              |



**VT-1052**

SKU 7986

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 3W                     |
| LUMENS                           | 200 Lm                 |
| BEAM ANGLE                       | 120°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal                  |
| UNIT COLOUR                      | White                  |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 115x300mm              |

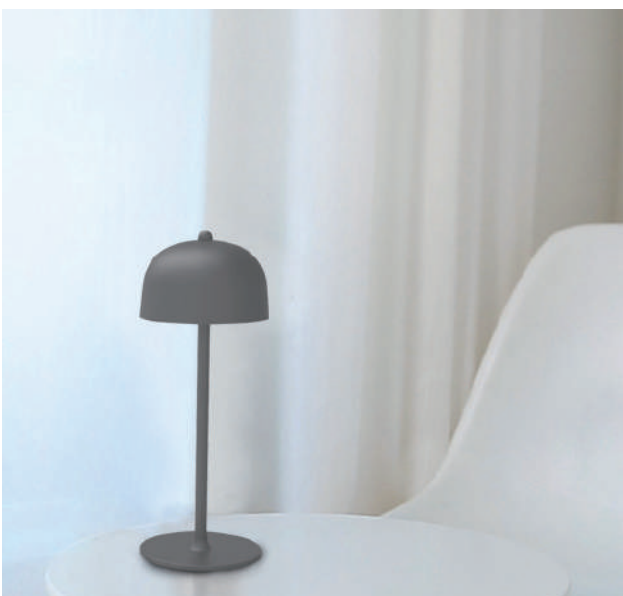

**VT-1052**

SKU 7985

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 3W                     |
| LUMENS                           | 200 Lm                 |
| BEAM ANGLE                       | 120°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal                  |
| UNIT COLOUR                      | Grey                   |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 115x300mm              |



**VT-1056**

SKU 7988

**TECHNICAL DATA**

|                                  |                        |
|----------------------------------|------------------------|
| WATTS                            | 2W                     |
| LUMENS                           | 100 Lm                 |
| BEAM ANGLE                       | 300°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>(Not included) |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | Black+Glass            |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 140x300mm              |



**VT-1181**

SKU 10449 - Black Body

SKU 10450 - White Body

**TECHNICAL DATA**

|                  |            |
|------------------|------------|
| WATTS            | 1.5W       |
| LUMENS           | 150 Lm     |
| BEAM ANGLE       | 120°       |
| IP RATING        | IP20       |
| BATTERY CAPACITY | 2200 mAh   |
| CHARGING TIME    | 2-3H       |
| WORKING TIME     | 6-8H       |
| MATERIAL         | Aluminum   |
| DIMENSION        | D86*H210mm |



**VT-1050**

SKU 7946

**TECHNICAL DATA**

|                                  |                        |
|----------------------------------|------------------------|
| WATTS                            | 3W                     |
| LUMENS                           | 200 Lm                 |
| BEAM ANGLE                       | 120°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>(Not included) |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal                  |
| UNIT COLOUR                      | Panited gold+black     |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 180x240mm              |



**Magnetic Table lamp**

**VT-7413**

SKU 23041 - 4000K

| TECHNICAL DATA   |          |
|------------------|----------|
| WATTS            | 3W       |
| LUMENS           | 300 Lm   |
| BEAM ANGLE       | 120°     |
| IP RATING        | IP20     |
| BATTERY CAPACITY | 1500 mAh |
| CHARGING TIME    | 2-3H     |
| WORKING TIME     | 6-8H     |

**Easy to Fix anywhere, anytime**



**Magnetic Table lamp**

**VT-7413**

SKU 23042 - 4000K

| TECHNICAL DATA   |          |
|------------------|----------|
| WATTS            | 3W       |
| LUMENS           | 300 Lm   |
| BEAM ANGLE       | 120°     |
| IP RATING        | IP20     |
| BATTERY CAPACITY | 1500 mAh |
| CHARGING TIME    | 2-3H     |
| WORKING TIME     | 6-8H     |

**Easy to Fix anywhere, anytime**



**VT-7413**

SKU 23043 - 4000K

| TECHNICAL DATA   |          |
|------------------|----------|
| WATTS            | 3W       |
| LUMENS           | 300 Lm   |
| BEAM ANGLE       | 120°     |
| IP RATING        | IP20     |
| BATTERY CAPACITY | 1500 mAh |
| CHARGING TIME    | 2-3H     |
| WORKING TIME     | 6-8H     |

**Easy to Fix anywhere, anytime**



**VT-1057**

SKU 7990

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 55 Lm                  |
| BEAM ANGLE                       | 180°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | Chrome                 |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 120x225mm              |



**VT-1057**

SKU 7991

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 55 Lm                  |
| BEAM ANGLE                       | 180°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | Antique Bronze         |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 120x225mm              |



**VT-1057**

SKU 7989

| TECHNICAL DATA                   |                        |
|----------------------------------|------------------------|
| WATTS                            | 1W                     |
| LUMENS                           | 55 Lm                  |
| BEAM ANGLE                       | 180°                   |
| INPUT POWER                      | 5V, 1A                 |
| ADAPTER OUTPUT<br>[Not included] |                        |
| IP RATING                        | IP20                   |
| BATTERY                          | Lithium DC, 5V Battery |
| BATTERY CAPACITY                 | 1800 mAh               |
| CHARGING TIME                    | 2-3H                   |
| WORKING TIME                     | 6-8H                   |
| TOUCH DIMMING LEVEL              |                        |
| MATERIAL                         | Metal+Acrylic          |
| UNIT COLOUR                      | French Gold            |
| CABLE LENGTH                     | 1 Meter [Type C]       |
| DIMENSION                        | 120x225mm              |



**VT-7564**

SKU 10566 - CHAMPAGNE GOLD+ AMBER GLASS

**VT-7564**

SKU 10567 - BLACK LAMP+SMOKY GLASS

| TECHNICAL DATA |          |
|----------------|----------|
| WATTS          | 7.4W     |
| LUMENS         | 2400 Lm  |
| DIMMING        | YES      |
| CCT            | 3000K    |
| DIMENSION      | 85X156mm |




**VT-7566**

SKU 10568 - BLACK BODY

**VT-7566**

SKU 10569- WHITE BODY

| TECHNICAL DATA |              |
|----------------|--------------|
| WATTS          | 2W           |
| LUMENS         | 1200 Lm      |
| DIMMING        | Touch switch |
| CCT            | 3-in-one-CCT |
| DIMENSION      | 100x230mm    |

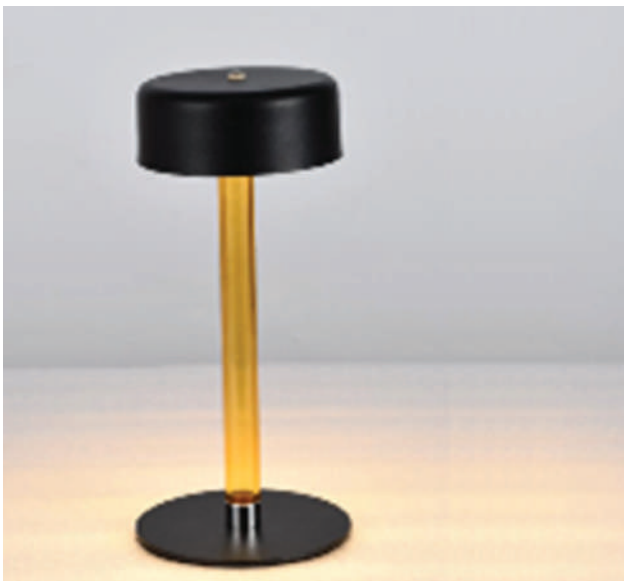

**VT-7567**

SKU 10570 - BLACK+TRANSPARENT CENTER PILLAR

**VT-7567**

SKU 10571 - WHITE+TRANSPARENT CENTER PILLAR

| TECHNICAL DATA |                        |
|----------------|------------------------|
| WATTS          | 8W                     |
| LUMENS         | 1800 Lm                |
| DIMMING        | Touch switch + Dimming |
| CCT            | 3-in-one-CCT           |
| DIMENSION      | 120x260mm              |



**4W  
LED TABLE LAMP**

|                |                |
|----------------|----------------|
| VT-1028        | VT-1028        |
| 10325 - 3-IN-1 | 10326 - 3-IN-1 |
| BLACK          | WHITE          |



**4W  
LED TABLE LAMP**

|                |                |
|----------------|----------------|
| VT-1034        | VT-1034        |
| 10330 - 3-IN-1 | 10324 - 3-IN-1 |
| BLACK          | WHITE          |



**3W  
LED TABLE LAMP**

VT-1033  
10327 - 3-IN-1



**3W  
LED TABLE LAMP**

|                |                |
|----------------|----------------|
| VT-1073        | VT-1073        |
| 10328 - 3-IN-1 | 10329 - 3-IN-1 |
| BLACK          | WHITE          |



**VT-7816**

SKU 8017

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 32W                |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 750mA              |
| <b>Lumens:</b>               | 3880 Lm            |
| <b>Beam Angle:</b>           | 180°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D600+D400+D200 mm  |
| <b>Unit Colour:</b>          | Black              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7816**

SKU 8018

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 32W                |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 750mA              |
| <b>Lumens:</b>               | 3880 Lm            |
| <b>Beam Angle:</b>           | 180°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D600+D400+D200 mm  |
| <b>Unit Colour:</b>          | White              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7816**

SKU 8019

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 32W                |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 750mA              |
| <b>Lumens:</b>               | 3880 Lm            |
| <b>Beam Angle:</b>           | 180°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D600+D400+D200 mm  |
| <b>Unit Colour:</b>          | Paint Gold         |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7799**

SKU 8012

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 20W                |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 500mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 2540 Lm            |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 180°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D500 mm            |
| <b>Unit Colour:</b>          | Black              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7799**

SKU 8013

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 20W                |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 500mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 2540 Lm            |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 180°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D500 mm            |
| <b>Unit Colour:</b>          | White              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7799**

SKU 8014

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 20W                |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 500mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 2540 Lm            |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 180°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D500 mm            |
| <b>Unit Colour:</b>          | Paint Gold         |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |





**VT-7818**

SKU 8022

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 16W                |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 350mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 1820 Lm            |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 270°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | L860xW300 mm       |
| <b>Unit Colour:</b>          | Black              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7818**

SKU 8023

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 16W                |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 350mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 1820 Lm            |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 270°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | L860xW300 mm       |
| <b>Unit Colour:</b>          | Paint Gold         |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7798**

SKU 8010

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 24W                |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 600mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 3240 Lm            |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 270°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | L720xW300 mm       |
| <b>Unit Colour:</b>          | Black              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7798**

SKU 8011

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 24W                |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 600mA              |
| <b>Lumens:</b>               | 3240 Lm            |
| <b>Beam Angle:</b>           | 270°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | L720xW300 mm       |
| <b>Unit Colour:</b>          | Champagne Gold     |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7817**

SKU 8020

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 18W                |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 450mA              |
| <b>Lumens:</b>               | 2260 Lm            |
| <b>Beam Angle:</b>           | 180°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | L700xW250 mm       |
| <b>Unit Colour:</b>          | Black              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7817**

SKU 8021

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 18W                |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 450mA              |
| <b>Lumens:</b>               | 2260 Lm            |
| <b>Beam Angle:</b>           | 180°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | L700xW250 mm       |
| <b>Unit Colour:</b>          | Paint Gold         |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7794**

SKU 7992


|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 8.5W               |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 200mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 850 Lm             |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D100 mm            |
| <b>Unit Colour:</b>          | Light Grey         |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7794**

SKU 7993


|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 8.5W               |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 200mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 850 Lm             |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D100 mm            |
| <b>Unit Colour:</b>          | White              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |

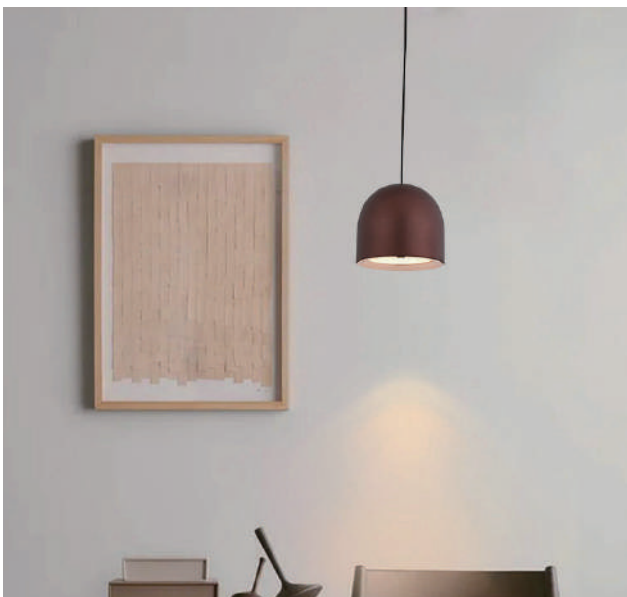

**VT-7794**

SKU 7994

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 8.5W               |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 200mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 850 Lm             |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D100 mm            |
| <b>Unit Colour:</b>          | Brown              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |

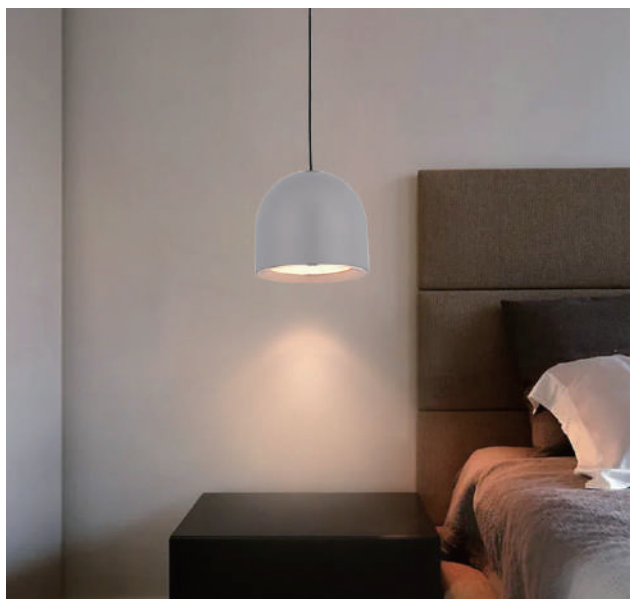

**VT-7795**

SKU 7995


|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 8W                 |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 300mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 850 Lm             |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D100 mm            |
| <b>Unit Colour:</b>          | Light Grey         |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7795**

SKU 7996

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 8.5W               |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 300mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 850 Lm             |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D100 mm            |
| <b>Unit Colour:</b>          | White              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |

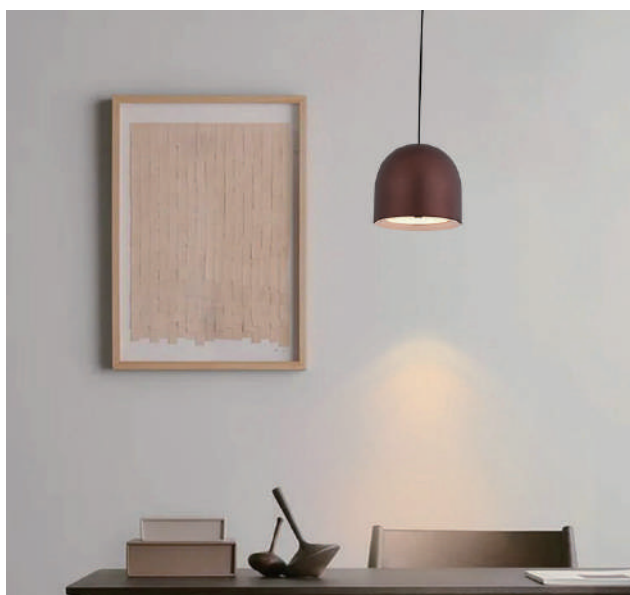

**VT-7795**

SKU 7997

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 8.5W               |
| <hr/>                        |                    |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <hr/>                        |                    |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 300mA              |
| <hr/>                        |                    |
| <b>Lumens:</b>               | 850 Lm             |
| <hr/>                        |                    |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D100 mm            |
| <b>Unit Colour:</b>          | Brown              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7796**

SKU 7998

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 8.5W               |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 200mA              |
| <b>Lumens:</b>               | 850 Lm             |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D120 mm            |
| <b>Unit Colour:</b>          | Black              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7796**

SKU 7999

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 8.5W               |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 200mA              |
| <b>Lumens:</b>               | 850 Lm             |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D120 mm            |
| <b>Unit Colour:</b>          | White              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



**VT-7796**

SKU 8000

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          |                    |
| <b>Module Power:</b>         | 8.5W               |
| <b>Total Voltage/frqncy:</b> |                    |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        |                    |
| <b>Module Current:</b>       | 200mA              |
| <b>Lumens:</b>               | 850 Lm             |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D120 mm            |
| <b>Unit Colour:</b>          | Gold               |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |




**VT-7797**

SKU 8001

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          | 8.5W               |
| <b>Module Power:</b>         | 8.5W               |
| <b>Total Voltage/frqncy:</b> | AC220-240V,50/60Hz |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        | 300mA              |
| <b>Module Current:</b>       | 300mA              |
| <b>Lumens:</b>               | 850 Lm             |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D120 mm            |
| <b>Unit Colour:</b>          | Black              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



ADJUSTABLE WIRE (UP/DOWN) LENGTH

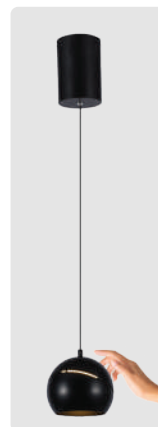

TOUCH ON/OFF LIGH




**VT-7797**

SKU 8002

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          | 8W                 |
| <b>Module Power:</b>         | 8W                 |
| <b>Total Voltage/frqncy:</b> | AC220-240V,50/60Hz |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        | 300mA              |
| <b>Module Current:</b>       | 300mA              |
| <b>Lumens:</b>               | 850 Lm             |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D120 mm            |
| <b>Unit Colour:</b>          | White              |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



ADJUSTABLE WIRE (UP/DOWN) LENGTH

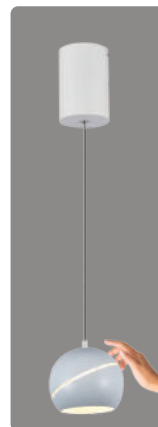

TOUCH ON/OFF LIGH



**VT-7797**

SKU 8003

|                              |                    |
|------------------------------|--------------------|
| <b>Total Power:</b>          | 8.5W               |
| <b>Module Power:</b>         | 8.5W               |
| <b>Total Voltage/frqncy:</b> | AC220-240V,50/60Hz |
| <b>Module Voltage:</b>       | AC220-240V,50/60Hz |
| <b>Total Current:</b>        | 300mA              |
| <b>Module Current:</b>       | 300mA              |
| <b>Lumens:</b>               | 850 Lm             |
| <b>Beam Angle:</b>           | 120°               |
| <b>Life Span:</b>            | 20000H             |
| <b>On/Off:</b>               | >15000H            |
| <b>Unit Size:</b>            | D120 mm            |
| <b>Unit Colour:</b>          | Gold               |
| <b>IP Rating:</b>            | IP20               |
| <b>LED Colour:</b>           | 3000K              |
| <b>CRI:</b>                  | >80                |
| <b>Dimmable/Non Dimmable</b> | Non Dimmable       |



ADJUSTABLE WIRE (UP/DOWN) LENGTH



TOUCH ON/OFF LIGH

**VT-7568**

SKU: 10572 53\*110mm  
SKU: 10573 53\*125mm  
SKU: 10574 53\*150mm  
SKU: 10575 53\*175mm  
SKU: 10576 53\*200mm

AA BATTERY





**VT-7958**  
SKU: 15356  
Overall size : 50\*50\*7CM  
Light source: LED, 150W, 15500 LM  
3CCT  
Dimmable+APP.+ remote controller  
PF: >0.5  
CRI > 80

**150W | 15500LM**

SMART APP CONTROL  
REMOTE CONTROL




**VT-7959**  
SKU: 15357  
Overall size: 51\*50\*7CM  
Light source: LED, 120W, 12800 LM  
3CCT  
Dimmable+APP.+ remote controller  
PF: >0.5  
CRI > 80

**120W | 12800LM**

SMART APP CONTROL  
REMOTE CONTROL




**VT-7961**  
SKU: 15359  
Overall size: D50\*7 cm  
Light source: LED, 125W, 13100 LM  
3CCT  
Dimmable+APP.+ remote controller  
PF: >0.5  
CRI > 80

**125W | 13100LM**

SMART APP CONTROL  
REMOTE CONTROL




**VT-7960**  
SKU: 15358  
Overall size: D52\*5CM  
Light source: LED, 95W, 9900 LM  
3CCT  
Dimmable+APP.+ remote controller  
PF: >0.5  
CRI > 80

**95W | 9900LM**

SMART APP CONTROL  
REMOTE CONTROL




**VT-7962**  
SKU: 15360  
Overall size: 50\*50\*5CM  
Light source: LED, 130W, 13600 LM  
3CCT  
Dimmable+APP.+ remote controller  
PF: >0.5  
CRI > 80

**130W | 13600LM**

SMART APP CONTROL  
REMOTE CONTROL








**VT-7755**

Power: 48W  
 Lumen: 5000  
 Overall Size: Ø500\*H1200mm  
 Material: Steel+PMMA  
 Finish: White  
 Dimming: Triac  
 SKU: 6903  
 CCT:3000K  
 SKU: 6904  
 CCT:4000K



**VT-7756**

Power: 45W  
 Lumen: 4470  
 Overall Size: L1140\*W220\*H1500mm  
 Material: Steel+Aluminum+PC  
 Finish: Black  
 Dimming: Triac  
 SKU: 6906  
 CCT:3000K

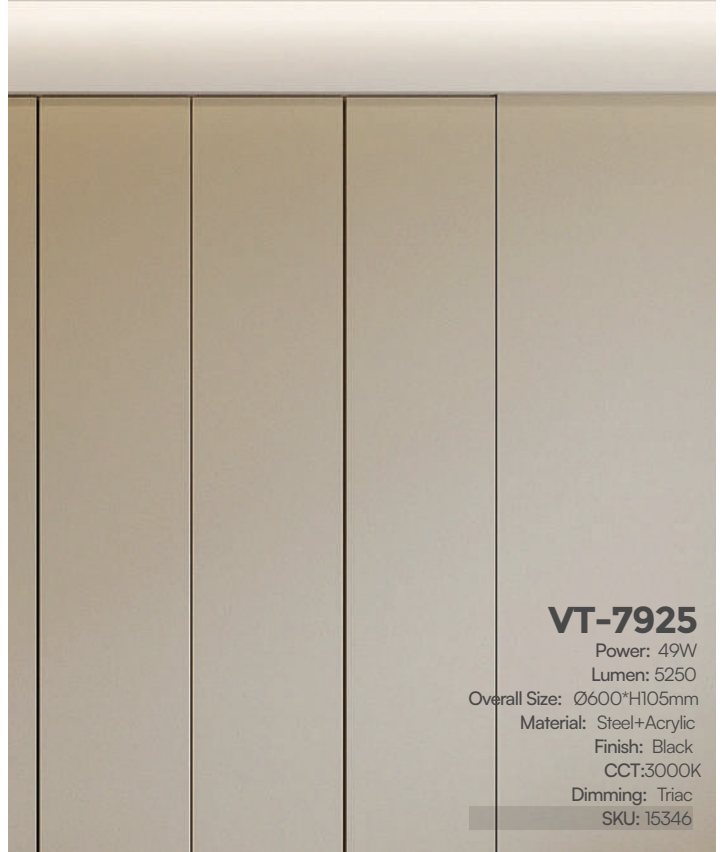

**VT-7925**

Power: 49W  
Lumen: 5250  
Overall Size: Ø600\*H105mm  
Material: Steel+Acrylic  
Finish: Black  
CCT:3000K  
Dimming: Triac  
SKU: 15346

**VT-7765**

Power: 12W  
Lumen: 1280  
Overall Size: Ø240\*H50mm  
Material: Steel+PMMA  
Finish: Black  
CCT:4000K  
SKU: 6931



Overall Size: Ø350\*H62mm  
finish: Black  
SKU: 6986



Overall Size: Ø350\*H62mm  
finish: White  
SKU: 6987

**VT-7779**

Power: 18W  
Lumen: 1280  
Overall Size: Ø350\*H62mm  
Material: Aluminum+Steel+PMMA  
CCT:4000K  
SKU: 6986  
Black Finish  
SKU: 6987  
White Finish



Overall Size: Ø400\*H62mm  
finish: Black  
SKU: 6988



Overall Size: Ø400\*H62mm  
finish: White  
SKU: 6989

**VT-7780**

Power: 24W  
Lumen: 2500  
Overall Size: Ø450\*H62mm  
Material: Aluminum+Steel+PMMA  
CCT:4000K  
SKU: 6988  
Black Finish  
SKU: 6989  
White Finish



Overall Size: Ø450\*H62mm  
finish: Black  
SKU: 6908



Overall Size: Ø450\*H62mm  
finish: White  
SKU: 6909

**VT-7757**

Power: 38W  
Lumen: 4050  
Overall Size: Ø400\*H62mm  
Material: Aluminum+Steel+PMMA  
CCT:4000K  
Dimming: Triac  
SKU: 6908  
Black Finish  
SKU: 6909  
White Finish



Overall Size: Ø500\*H62mm  
finish: Black  
SKU: 69141



Overall Size: Ø500\*H62mm  
finish: White  
SKU: 6912

**VT-7758**

Power: 48W  
Lumen: 4400  
Overall Size: Ø500\*H62mm  
Material: Aluminum+Steel+PMMA  
CCT:4000K  
Dimming: Triac  
SKU: 69141  
Black Finish  
SKU: 6912  
White Finish



Overall Size: L350\*W350\*H62mm  
finish: Black  
SKU: 6990



Overall Size: L350\*W350\*H62mm  
finish: White  
SKU: 6991

**VT-7757**

Power: 18W  
Lumen: 1490  
Overall Size: L350\*W350\*H62mm  
Material: Aluminum+Steel+PMMA  
CCT:4000K  
SKU: 6990  
Black Finish  
SKU: 6991  
White Finish



Overall Size: L400\*W400\*H62mm  
finish: Black  
SKU: 6914



Overall Size: L400\*W400\*H62mm  
finish: White  
SKU: 6915

**VT-7757**

Power: 38W  
Lumen: 4000  
Overall Size: L400\*W400\*H62mm  
Material: Aluminum+Steel+PMMA  
CCT:4000K  
SKU: 6914  
Black Finish  
SKU: 6915  
White Finish



Overall Size: L450\*W450\*H62mm  
finish: Black  
SKU: 6992



Overall Size: L450\*W450\*H62mm  
finish: White  
SKU: 6993

**VT-7782**

Power: 24W  
Lumen: 2450  
Overall Size: L450\*W450\*H62mm  
Material: Aluminum+Steel+PMMA  
CCT:4000K  
SKU: 6992  
Black Finish  
SKU: 6993  
White Finish



Overall Size: L500\*W500\*H62mm  
finish: Black  
SKU: 6917



Overall Size: L500\*W500\*H62mm  
finish: White  
SKU: 6918

**VT-7758**

Power: 48W  
Lumen: 4480  
Overall Size: L500\*W500\*H62mm  
Material: Aluminum+Steel+PMMA  
CCT:4000K  
Dimming: Triac  
SKU: 6917  
Black Finish  
SKU: 6918  
White Finish



Overall Size: Ø300\*H50mm  
Finish : Black  
SKU: 6994



Overall Size: Ø300\*H50mm  
Finish : White  
SKU: 6995

**VT-7783**

Power: 24W  
Lumen: 2560  
Overall Size: Ø300\*H50mm  
Material: Aluminum+Steel+Silicone  
CCT:4000K  
SKU: 6994  
Black Finish  
SKU: 6995  
White Finish



Overall Size: Ø450\*H50mm  
Finish : Black  
SKU: 6920



Overall Size: Ø450\*H50mm  
Finish : White  
SKU: 6921

**VT-7761**

Power: 38W  
Lumen: 4050  
Overall Size: Ø450\*H50mm  
Material: Aluminum+Steel+Silicone  
CCT:4000K  
SKU: 6920  
Black Finish  
SKU: 6921  
White Finish



Overall Size: Ø250\*H160mm  
Finish : Black  
SKU: 6996



Overall Size: Ø250\*H160mm  
Finish : White  
SKU: 6997

**VT-7784**

Power: 24W  
Lumen: 2560  
Overall Size: Ø250\*H160mm  
Material: Aluminum+Steel+Silicone  
CCT:4000K  
SKU: 6996   
Black Finish  
SKU: 6997   
White Finish



Overall Size: Ø520\*H200mm  
Finish : Black  
SKU: 6923



Overall Size: Ø520\*H200mm  
Finish : White  
SKU: 6924

**VT-7762**

Power: 54W  
Lumen: 5330  
Overall Size: Ø520\*H200mm  
Material: Aluminum+Steel+Silicone  
CCT:4000K  
Dimming: Triac  
SKU: 6923   
Black Finish  
SKU: 6924   
White Finish



Overall Size: Ø250\*H160mm  
Finish : White  
SKU: 6926

Overall Size: Ø250\*H160mm  
Finish : White  
SKU: 6927

**VT-7763**

Power: 20W  
Lumen: 2130  
Overall Size: Ø250\*H130mm  
Material: Aluminum+Steel+Silicone  
CCT:4000K  
SKU: 6926  
Black Finish  
SKU: 6927  
White Finish



Overall Size: Ø300mm  
Finish : White  
SKU: 6998

**VT-7785**

Power: 24W  
Lumen: 2560  
Overall Size: Ø300mm  
Material: Aluminum+Steel+Silicone  
CCT:4000K  
SKU 6998  
White Finish



Overall Size: Ø520\*H220mm  
Finish : White  
SKU: 6929

**VT-7764**

Power: 43W  
Lumen: 4580  
Overall Size: Ø520\*H220mm  
Material: Aluminum+Steel+Silicone  
CCT:4000K  
SKU: 6929  
White Finish



**VT-7766**

Power: 36W  
Lumen: 3200  
Overall Size: L900\*Ø210mm  
Material: Aluminum+Steel+Silicone  
Finish: Black  
CCT:4000K  
SKU: 6933



**VT-7767**

Power: 17W  
Lumen: 1500  
Overall Size: L910\*Ø150\*Ø210mm  
Material: Aluminum+Steel+Silicone  
Finish: Black  
CCT:4000K  
SKU: 6935






**VT-7768**

Power: 12W  
Lumen: 1280  
Overall Size: L915\*H1000mm  
Material: Aluminum+Steel+Silicone  
Finish: Black  
CCT:4000K  
SKU: 6937



**VT-7770**

Power: 24W  
Lumen: 2500  
Overall Size: L1500\*H115mm  
Material: Aluminum+Steel+Silicone  
Finish: Black  
CCT:4000K  
SKU: 6941

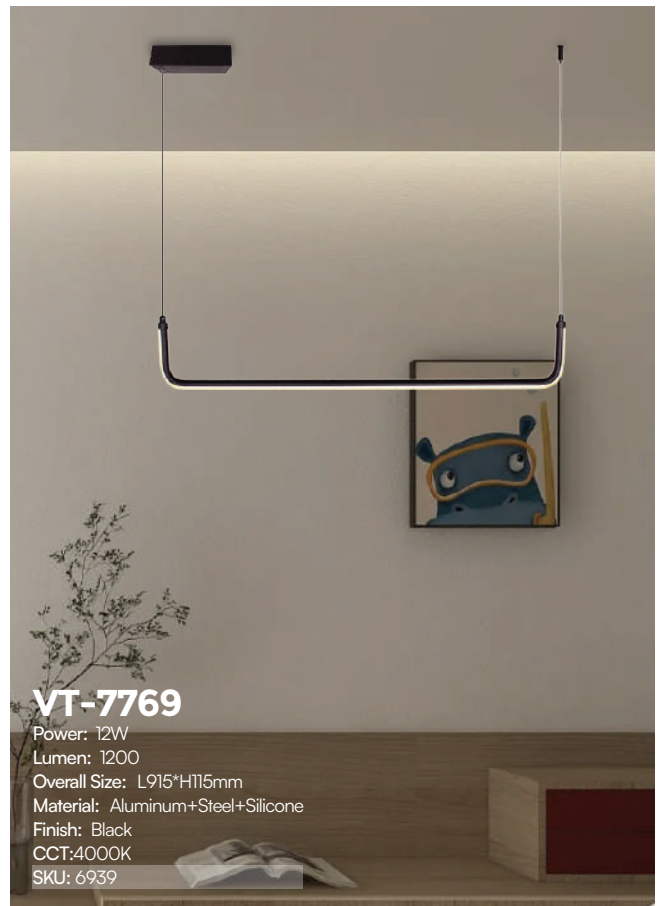


**VT-7769**

Power: 12W  
Lumen: 1200  
Overall Size: L915\*H115mm  
Material: Aluminum+Steel+Silicone  
Finish: Black  
CCT:4000K  
SKU: 6939



**VT-7760**

Power: 50W  
Lumen: 6100  
Overall Size: Ø600\*H80mm  
Material: Steel+PS  
CCT:4000K  
Dimming: Triac  
SKU: 6957  
Black Finish  
SKU: 6958  
White Finish  
SKU: 6959  
Corten Finish

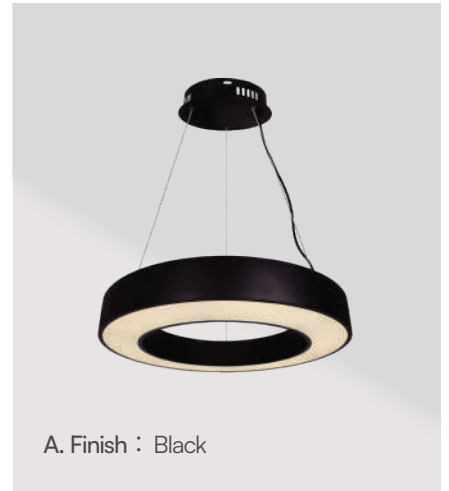


A. Finish : Black



B. Finish : White



C. Finish : Corten

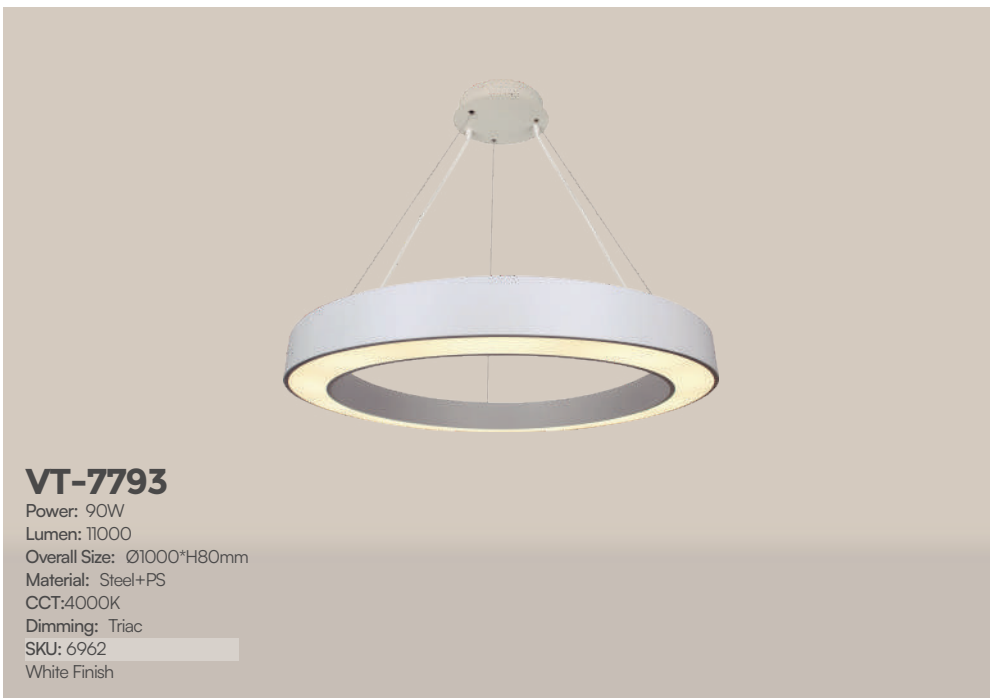

**VT-7793**

Power: 90W  
Lumen: 11000  
Overall Size: Ø1000\*H80mm  
Material: Steel+PS  
CCT:4000K  
Dimming: Triac  
SKU: 6962  
White Finish

**VT-7786**

Power: 14W  
Lumen: 1490  
Overall Size: L340\*H95mm  
Material: Aluminum+Steel+Acrylic  
Finish: Satin Nickel Painting  
CCT:4000K  
SKU: 6937



**VT-7787**

Power: 20W  
Lumen: 2130  
Overall Size: Ø450\*H105mm  
Material: Aluminum+Steel+Acrylic  
Finish: Black  
CCT:3000K  
SKU: 7000



**VT-7789**

Power: 24W  
Lumen: 2560  
Overall Size: L525\*W185\*H80mm  
Material: Aluminum+Silicone  
Finish: Black  
CCT:3000K  
SKU: 7002



**VT-7788**

Power: 12W  
Lumen: 1280  
Overall Size: L945\*H60mm  
Material: Steel+Silicone  
Finish: Black  
CCT:3000K  
SKU: 7001



**VT-7771**

Power: 23W  
Lumen: 2130  
Overall Size: L1200\*H55mm  
Material: Aluminum+Steel+Acrylic  
Finish: Black  
CCT:4000K  
SKU: 6943



### VT-7790

Power: 24W  
Lumen: 2500  
Overall Size: L445\*H125mm  
Material: Aluminum+Steel+Silicone  
Finish: Black  
CCT:3000K  
SKU: 7003





**VT-7915**

Power: 38W  
Lumen: 4100  
Overall Size: L850\*W850\*H105mm  
Material: Steel+Silicone  
Finish: Black  
SKU: 14994  
CCT:3000K  
SKU: 14995  
CCT:4000K



**VT-7792**

Power: 20W  
Lumen: 2130  
Overall Size: L460\*W410\*H125mm  
Material: Aluminum+Steel+Silicone  
Finish: Black  
CCT:3000K  
SKU: 7005



**VT-7791**

Power: 24W  
Lumen: 2560  
Overall Size: L610\*H120mm  
Material: Aluminum+Steel+Silicone  
Finish: Black  
CCT:3000K  
SKU: 7004



**VT-7918**

Power: 20W  
Lumen: 1215  
Overall Size: L945\*W325\*H1200mm  
Material: Steel  
Finish: Gold  
CCT:3000K  
SKU: 15339





**VT-7920**

Power: 46W  
Lumen: 4900  
Overall Size: L560\*W485\*H1560mm  
Material: Aluminum+Steel+Silicone  
Finish: Gold  
CCT:3000K  
Dimming: Triac  
SKU: 15341



**VT-7921**

Power: 46W  
Lumen: 4900  
Overall Size: L640\*W360\*H410mm  
Material: Aluminum+Steel+Silicone  
Finish: Black  
CCT:3000K  
Dimming: Triac  
SKU: 15342






**VT-7923**

Power: 45W  
Lumen: 4800  
Overall Size: L1200\*W120\*H1600mm  
Material: Aluminum+Silicone  
Finish: Black  
CCT:3000K  
Dimming: Triac  
SKU: 15344



**VT-7926**

Power: 47W  
Lumen: 5000  
Overall Size: L900\*W670\*H90mm  
Material: Aluminum+Silicone  
Finish: Black  
CCT:3000K  
Dimming: Triac  
SKU:15347

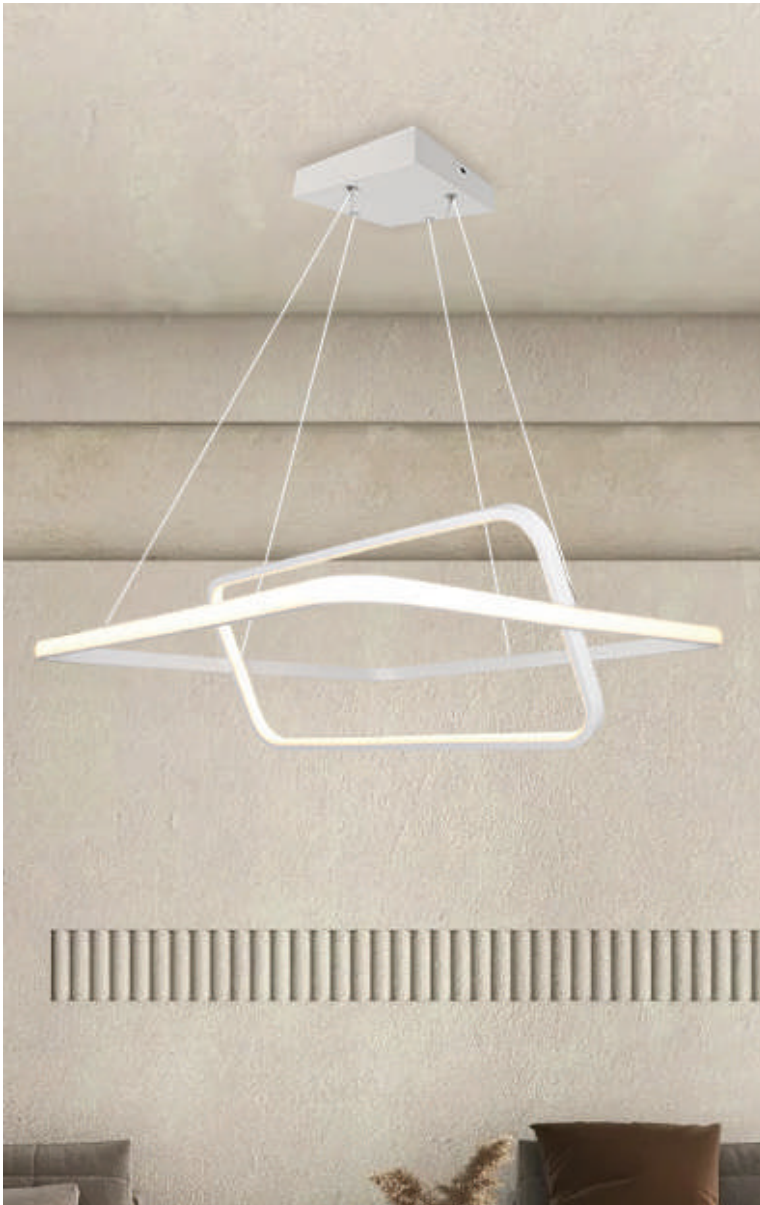

**VT-7909**

Power: 48W  
 Lumen: 5150  
 Overall Size: L600\*W600\*H1200  
 Material: Steel+Silicone  
 Finish: White  
 Dimming: Triac  
 SKU: 14988  
 CCT3000K  
 SKU: 14989  
 CCT4000K



**VT-7923**

Power: 46W  
 Lumen: 4900  
 Overall Size: Ø400\*Ø600\*Ø800\*H1500mm  
 Material: Aluminum+Silicone  
 Finish: Black  
 CCT:3000K  
 Dimming: Triac  
 SKU:15345

**VT-7922**

Power: 42W  
Lumen: 4500

Overall Size: L850\*W310\*H1200mm

Material: Steel+Acrylic

Finish: Gold

CCT:3000K

Dimming: Triac

SKU: 15343



**VT-7927**

Power: 37W

Lumen: 3950


Overall Size: L350\*W180\*H500mm

Material: Steel+Silicone

Finish: Gold

CCT:3000K

SKU:15348

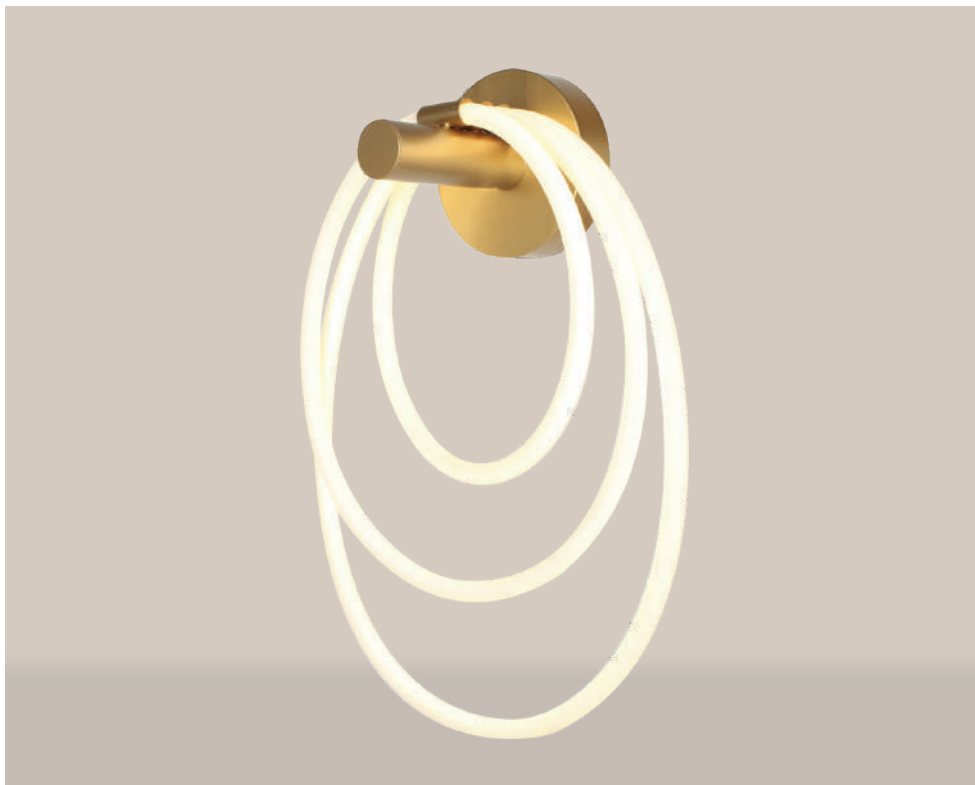



**VT-7917**

Power: 12W  
Lumen: 1300  
Overall Size: L280\*H1800mm  
Material: Steel+Silicone  
SKU: 14998  
Finish Black  
CCT:3000K  
SKU: 14999  
Finish Black  
CCT:4000K  
SKU: 15000  
Finish White  
CCT:3000K  
SKU: 15338  
Finish White  
CCT:4000K



**VT-7906**

Power: 14W  
Lumen: 1490  
Overall Size: L250\*W100\*H180mm  
Material: Aluminum+Steel+Silicone  
SKU:14980  
CCT4000K  
Black Finish  
SKU:14981  
CCT3000K  
Black Finish  
SKU:14982  
CCT4000K  
White Finish  
SKU:14983  
CCT3000K  
White Finish



**VT-7907**

Power: 38W  
Lumen: 4000  
Overall Size: Ø500\*H200mm  
Material: Steel+PMMA  
Finish: White  
SKU:14984  
CCT:3000K  
SKU: 14985  
CCT:4000K



**VT-7919**

Power: 49W  
Lumen: 5250  
Overall Size: Ø700\*H1200mm  
Material: Aluminum+Steel+Silicone  
Finish: Black  
CCT:3000K  
Dimming: Triac  
SKU: 15340



**VT-7914**

Power: 48W  
 Lumen: 5150  
 Overall Size: L1100\*W800\*H1200mm  
 Material: Steel+Silicone  
 Finish: White  
 Dimming: Triac  
 SKU: 14992  
 CCT:3000K  
 SKU: 14993  
 CCT: 4000K



**VT-7911**

Power: 48W  
 Lumen: 5150  
 Overall Size: L600\*H50  
 Material: Steel+Silicone  
 Finish: Black  
 Dimming: Triac  
 SKU: 14990  
 CCT:3000K  
 SKU: 14991  
 CCT: 4000K



**VT-7908**

Power: 48W  
Lumen: 5150  
Overall Size: Ø800\*H1200mm  
Material: Steel+Silicone  
Finish: White  
Dimming: Triac  
SKU:14986  
CCT:3000K  
SKU:14987  
CCT:4000K



**VT-7916**

Power: 48W  
Lumen: 5150  
Overall Size: Ø800\*H1200mm  
Material: Steel+Silicone  
Finish: White  
Dimming: Triac  
SKU: 14996  
CCT:3000K  
SKU: 14997  
CCT:4000K

# SOLAR ENERGY



**V-TAC**  
Meaningful Innovation.





# PV CABLES

|                        | 50M ROLL    | 100M ROLL   | 500M ROLL   |
|------------------------|-------------|-------------|-------------|
| 4mm <sup>2</sup> Red   | SKU : 11821 | SKU : 11418 | SKU : 11807 |
| 4mm <sup>2</sup> Black | SKU : 11822 | SKU : 11414 | SKU : 11805 |
| 6mm <sup>2</sup> Red   | SKU : 11829 | SKU : 11419 | SKU : 11808 |
| 6mm <sup>2</sup> Black | SKU : 11830 | SKU : 11415 | SKU : 11806 |

## 4mm<sup>2</sup>



|                           |                        |
|---------------------------|------------------------|
| Conductor                 | Stranded tinned copper |
| Size                      | 4mm <sup>2</sup>       |
| Stranding                 | 56/0.285±0.01mm        |
| Diameter                  | 2.4mm                  |
| Primary Insulation        | XLPE                   |
| Minimum Average Thickness | 0.7mm                  |
| Secondary Insulation      | XLPE                   |
| Minimum Average Thickness | 0.8mm                  |
| Outer Diameter            | 5.5±0.15mm             |

## 6mm<sup>2</sup>



|                           |                        |
|---------------------------|------------------------|
| Conductor                 | Stranded tinned copper |
| Size                      | 6mm <sup>2</sup>       |
| Stranding                 | 84/0.285±0.01mm        |
| Diameter                  | 3.0mm                  |
| Primary Insulation        | XLPE                   |
| Minimum Average Thickness | 0.7mm                  |
| Secondary Insulation      | XLPE                   |
| Minimum Average Thickness | 0.8mm                  |
| Outer Diameter            | 6.1±0.2mm              |


## 50M ROLL



## 100M ROLL



## 500M ROLL

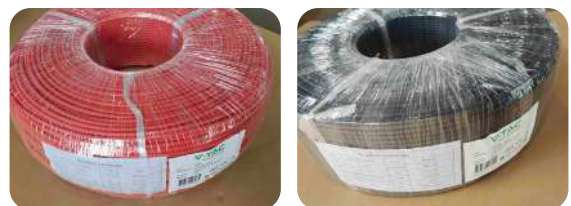

# SOLAR PANELS

UP TO  
**12** YEAR  
WARRANTY  
PRODUCT MATERIAL

**25** YEAR  
WARRANTY  
LINEAR POWER  
OUTPUT




## 410W MONOFACIAL HIGH EFFICIENCY MONO PV MODULE

|            |              |
|------------|--------------|
| Watts      | SKU   31 pcs |
| <b>410</b> | 11809        |

# TIER 1

**1**  
METRE  
CABLE

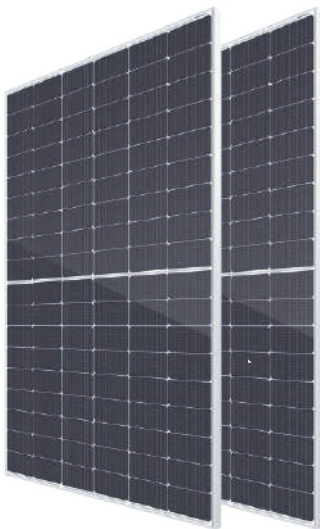


### MECHANICAL CHARACTERISTICS

|                       |                |
|-----------------------|----------------|
| Cell Type             | 182×91mm Mono  |
| No. of Cells          | 108(6×18)      |
| Dimensions            | 1722×1134×35mm |
| Weight                | 22.0kg         |
| Junction box          | IP68           |
| Operating Temperature | -40~+850C      |

### ELECTRICAL DATA (STC)

|                            |               |
|----------------------------|---------------|
| Peak Power(Pmax)           | <b>410.00</b> |
| Maximum Power Voltage(Vmp) | <b>31.30</b>  |
| Maximum Power Current(Imp) | <b>13.10</b>  |
| Open Circuit Voltage(Voc)  | <b>37.26</b>  |
| Short Circuit Current(Isc) | <b>13.79</b>  |
| Module Efficiency( % )     | <b>21.00</b>  |

**410W HALF CUT MONO SOLAR PANEL ALL BLACK 35MM FRAME**

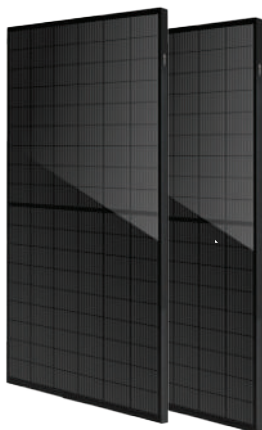

|            |              |
|------------|--------------|
| Watts      | SKU   31 pcs |
| <b>410</b> | 11519        |

**1**  
METRE  
CABLE


**MECHANICAL CHARACTERISTICS**

|                       |                   |
|-----------------------|-------------------|
| Cell Type             | 182*91 Mono       |
| No. of Cells          | 108 (6*18)        |
| Dimensions            | D:1722*1134*35mm  |
| Weight                | 21.50kg           |
| Junction box          | IP67/IP68 3diodes |
| Operating Temperature | -40~+85C          |

**ELECTRICAL DATA (STC)**

|                            |                 |
|----------------------------|-----------------|
| Peak Power(Pmax)           | <b>410.00</b>   |
| Maximum Power Voltage(Vmp) | <b>31.46</b>    |
| Maximum Power Current(Imp) | <b>13.04</b>    |
| Open Circuit Voltage(Voc)  | <b>37.45±3%</b> |
| Short Circuit Current(Isc) | <b>13.85±3%</b> |
| Module Efficiency( % )     | <b>20.97</b>    |

**450W HALF-CUT MONO SOLAR PANEL SILVER FRAME 35MM FRAME**

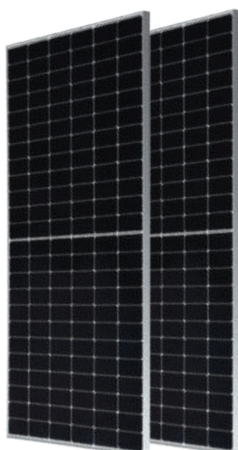

|            |              |              |              |
|------------|--------------|--------------|--------------|
| Watts      | SKU   11 pcs | SKU   14 pcs | SKU   31 pcs |
| <b>450</b> | 11553        | 11554        | 11353        |



11/14 pcs - Wooden Pallet


**MECHANICAL CHARACTERISTICS**

|                       |                   |
|-----------------------|-------------------|
| Cell Type             | 166*83 Mono       |
| No. of Cells          | 144 (6*24)        |
| Dimensions            | 2094*1038*35mm    |
| Weight                | 23.50kg           |
| Junction box          | IP67/IP68 3diodes |
| Operating Temperature | -40~+85C          |

**ELECTRICAL DATA (STC)**

|                            |                 |
|----------------------------|-----------------|
| Peak Power(Pmax)           | <b>450.00</b>   |
| Maximum Power Voltage(Vmp) | <b>41.50</b>    |
| Maximum Power Current(Imp) | <b>10.85</b>    |
| Open Circuit Voltage(Voc)  | <b>49.30±3%</b> |
| Short Circuit Current(Isc) | <b>11.60±3%</b> |
| Module Efficiency( % )     | <b>20.70</b>    |

**545W HALF-CUT MONO SOLAR PANEL SILVER FRAME 35MM FRAME**

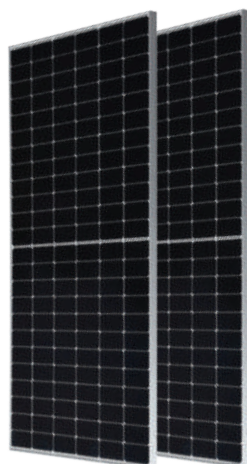

|            |              |
|------------|--------------|
| Watts      | SKU   31 pcs |
| <b>545</b> | 11354        |

**MECHANICAL CHARACTERISTICS**

|                       |                   |
|-----------------------|-------------------|
| Cell Type             | 182*91 Mono       |
| No. of Cells          | 144 (6*24)        |
| Dimensions            | 2279*1134*35mm    |
| Weight                | 28.40kg           |
| Junction box          | IP67/IP68 3diodes |
| Operating Temperature | -40~+85C          |

**ELECTRICAL DATA (STC)**

|                            |                 |
|----------------------------|-----------------|
| Peak Power(Pmax)           | <b>545.00</b>   |
| Maximum Power Voltage(Vmp) | <b>41.93</b>    |
| Maximum Power Current(Imp) | <b>13.00</b>    |
| Open Circuit Voltage(Voc)  | <b>49.90±3%</b> |
| Short Circuit Current(Isc) | <b>13.92±3%</b> |
| Module Efficiency( % )     | <b>21.08</b>    |

## Energy Storage Solution

# VESS MINI

## VESS MINI 30K

SKU: 11813

## VESS MINI 60K

SKU: 11814



### Scalable

Flexible and easily expanded as per the requirements.



### All in one Design

Integrate all things and easy for installation



### Grid Compatibility

Supports both on-grid and off-grid operations



### Intelligent Monitoring

Equip with cloud-based monitoring capabilities



## Energy Storage Solution

# VESS MINI PLUS

## VESS MINI PLUS 90K

SKU: 11815

## VESS MINI LPUS 180K

SKU: 11816



### Flexible

 \* All-in-one design and highly integrated  
 \* Modular design with different optional part


### Easy-to-install


\* Parallel installation side-by-side or back-to-back



### Compatible

 \* Grid-tied and off-grid  
 \* Optional PV input  
 \* Optional backup module


### Compliance

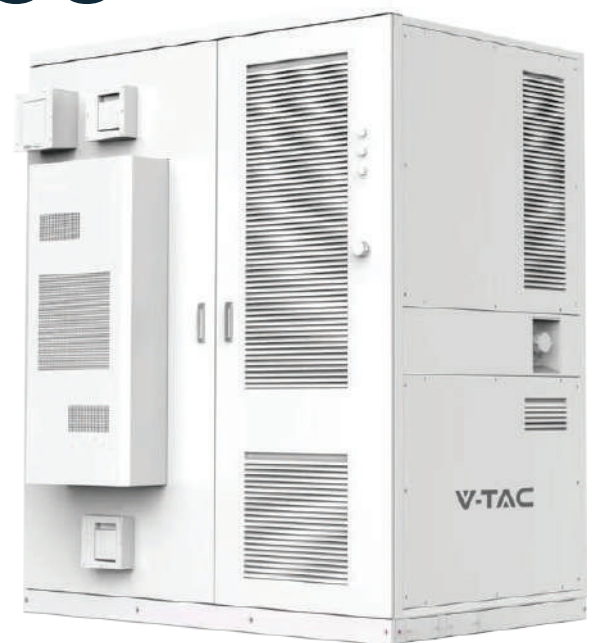 \* Global grid certified & listed PCS  
 \* Compliance with global safety standards.




### Smart ESS Solution

20kWh

VT-204100B-W  
SKU 11527

05 YEAR  
WARRANTY

# HIGH VOLTAGE



Villa



Telecom base station



Household



Island cottage



Pasture



Farmhouse

## RACK MOUNTING BATTERIES



9.60kWh

VT-48200B  
SKU 11523

05 YEAR  
WARRANTY

48.0V

VOLTAGE

CEI 0-21

CERTIFICATE



5.12kWh

VT-48100E-P2  
SKU 11377

05 YEAR  
WARRANTY

51.2V

VOLTAGE

CEI 0-21

CERTIFICATE

# INDOOR BATTERIES



**5.12kWh**

VT48100E-W  
SKU 11526

**05** YEAR  
WARRANTY

**51.2V**

VOLTAGE

**CEI 0-21**

CERTIFICATE



**5kWh**

AT48-100H  
LiFePO4 Battery Pack

VT-5139  
KU: 11448

**05** YEAR  
WARRANTY

**48V**

VOLTAGE

**CEI 0-21**

CERTIFICATE



**10kWh**

AT48-200H  
LiFePO4 Battery Pack

VT-10240  
SKU: 11447

**05** YEAR  
WARRANTY


**48V**

VOLTAGE

**CEI 0-21**

CERTIFICATE

# WATERPROOF BATTERIES

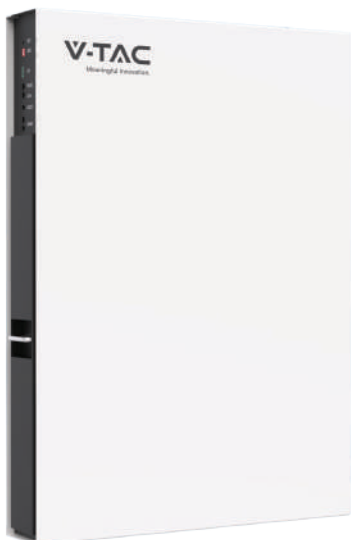


**48.0V**  
VOLTAGE

**7.64kWh**  
VT-48160  
SKU 11548

**SUPER  
SLIM  
DESIGN**

**05** YEAR  
WARRANTY

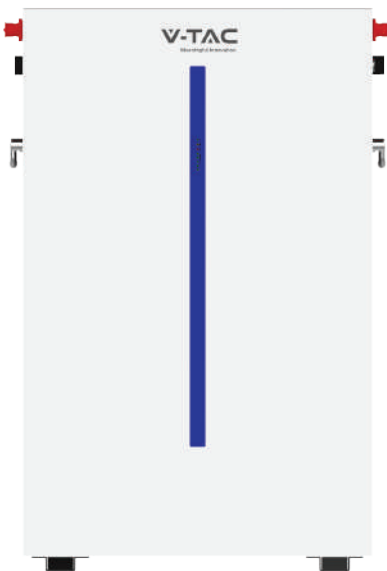

**6.14kWh**  
SKU 11539

**05** YEAR  
WARRANTY

**51.2V**  
VOLTAGE

**CEI 0-21**  
CERTIFICATE



**CEI 0-21**  
CERTIFICATE

**14.33kWh**  
VT-48280-W2  
SKU 11525

**51.2V**  
VOLTAGE

**05** YEAR  
WARRANTY



**CEI 0-21**  
CERTIFICATE

**5.12kWh**  
VT-48100-W2  
SKU 11524

**51.2V**  
VOLTAGE

**05** YEAR  
WARRANTY

# PORTABLE POWER STATIONS



## Portable Power Station

# 300W

VT-303N  
EU-Plug -11625 | BS-Plug -11740

- ⊙ Upgrade to LiFePO4 battery capacity 576Wh, 10 outlets
- ⊙ 1 x DC head 7909 input charging port: adapter charging (24V/4.2A),
- ⊙ 2 x DC head 5521 output port and 1 x automobile auxiliary power outlet(total 12V/8A)
- ⊙ Speed charger QC 3.0 Output USB-A , TYPE-C : Output PD18W X1, TYPE-C : Output PD65W
- ⊙ 2 x EU /BS standard AC ports, 600W AC Power Output
- ⊙ LED Flashlight with SOS
- ⊙ Quiet noise level during operation
- ⊙ Over-current, Over-voltage , over-temperature and Short Circuit Protections 9, Cycle life: 2000 Cycles





## Portable Power Station

# 600W

VT-606N  
 EU-Plug -11626 | BS-Plug -11741

- ⊙ Upgrade to LiFePO4 battery capacity 576Wh, 10 outlets
- ⊙ 1 x DC head 7909 input charging port: adapter charging (24V/4.2A), car charging (12V),
- ⊙ 2 x DC head 5521 output port and 1 x automobile auxiliary power outlet(total 12V/8A)
- ⊙ Speed charger QC 3.0 Output USB-A , TYPE-C : Output PD18W X1, TYPE-C : Output PD65W
- ⊙ 2 x EU /BS standard AC ports, 600W AC Power Output
- ⊙ LED Flashlight with SOS
- ⊙ Quiet noise level during operation
- ⊙ Over-current, Over-voltage , over-temperature and Short Circuit Protections 9, Cycle life: 2000 Cycles



## Portable Power Station

# 1000W

VT-1001N  
 EU-Plug -11627 | BS-Plug -11742

- ⊙ Upgrade to LiFePO4 battery capacity 1024Wh, 12 outlets
- ⊙ AC230V fast charging, wide range solar charging voltage (12-100V 400W MAX)
- ⊙ 2 x DC head 5521 output port and 1 x automobile auxiliary power outlet(total 12V/8A)
- ⊙ Speed charger QC 3.0 Output x 2, TYPE-C : Output PD100W X2
- ⊙ 3 x EU /BS standard AC ports, 1200W AC 230V Power Output
- ⊙ LED Flashlight with SOS
- ⊙ Quiet noise level during operation
- ⊙ Over-current, Over-voltage , over-temperature and Short Circuit Protections 9, Cycle life: 2000 Cycles



## Portable Power Station


# 2000W

VT-2002  
 SKU-11445



The product has built-in high-efficiency 32700 lithium iron phosphate cell, safe battery BMS management system and high-efficiency energy conversion circuit, which can be placed indoors or in cars. And can be used as home, office, outdoor emergency backup power supply. Charging can choose mains electricity or solar power to charge the product, without external adapter, the product is directly connected to the mains power supply, charging capacity can reach 98% in 1.6 hours, to achieve a real sense of fast charging. The product system can provide rated 240V 2500W AC output, and is equipped with 5V, 12V, 15V, 20V DC output and 15W wireless charging output to meet the requirements of different scenarios. Meanwhile, advanced power management system is configured to ensure long battery life and safety.

# SOLAR CARPORT

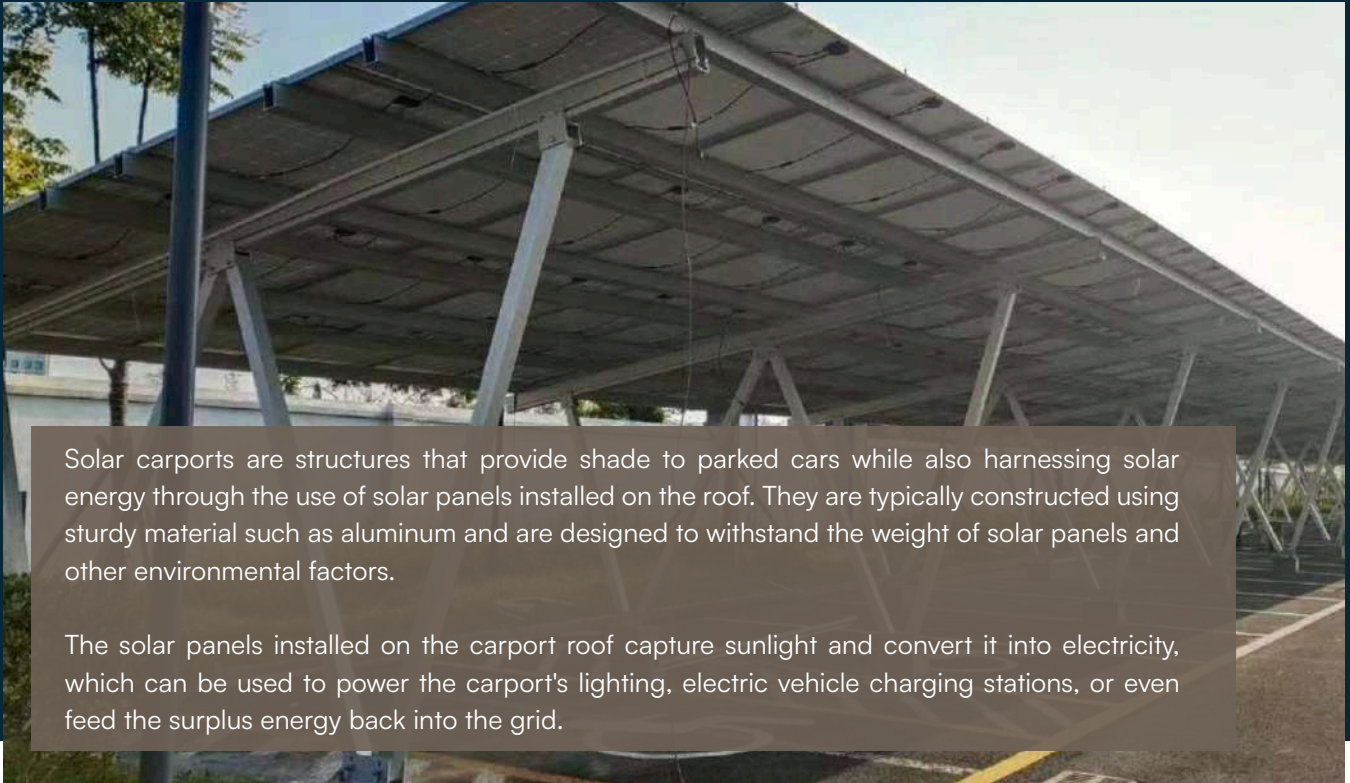

Solar carports are structures that provide shade to parked cars while also harnessing solar energy through the use of solar panels installed on the roof. They are typically constructed using sturdy material such as aluminum and are designed to withstand the weight of solar panels and other environmental factors.

The solar panels installed on the carport roof capture sunlight and convert it into electricity, which can be used to power the carport's lighting, electric vehicle charging stations, or even feed the surplus energy back into the grid.

## CARPORT FOR 2 CARS

### Crossbar Rail

| SKU           | Size   | Material | Quantity |
|---------------|--------|----------|----------|
| <b>118211</b> | 5900mm | Aluminum | 6        |



### Clamping kit

| SKU           | Size | Material | Quantity |
|---------------|------|----------|----------|
| <b>118212</b> | 35mm | Aluminum | 48       |



### Waterproof Accessories

| SKU           | Material | Quantity |
|---------------|----------|----------|
| <b>118223</b> | Aluminum | 28       |



# CARPORT FOR 2 CARS

## Mid Clamp

| SKU           | Size | Material | Quantity |
|---------------|------|----------|----------|
| <b>118213</b> | 35mm | Aluminum | 24       |



## End Clamp

| SKU           | Size | Material | Quantity |
|---------------|------|----------|----------|
| <b>118214</b> | 35mm | Aluminum | 12       |



## Carport Stringer

| SKU           | Size   | Material | Quantity |
|---------------|--------|----------|----------|
| <b>118215</b> | 5900mm | Aluminum | 2        |



## H Jackets(150)

| SKU           | Size  | Material | Quantity |
|---------------|-------|----------|----------|
| <b>118216</b> | 150mm | Aluminum | 2        |
| <b>118217</b> | 220mm |          |          |






## Carport Tube

| SKU           | Size   | Material | Quantity |
|---------------|--------|----------|----------|
| <b>118218</b> | 2500mm | Aluminum | 2        |
| <b>118219</b> | 3760mm |          |          |
| <b>118220</b> | 2950mm |          |          |



## Base (200)


| SKU           | Size  | Material | Quantity |
|---------------|-------|----------|----------|
| <b>118221</b> | 200mm | Aluminum | 6        |
| <b>118222</b> | 300mm |          |          |

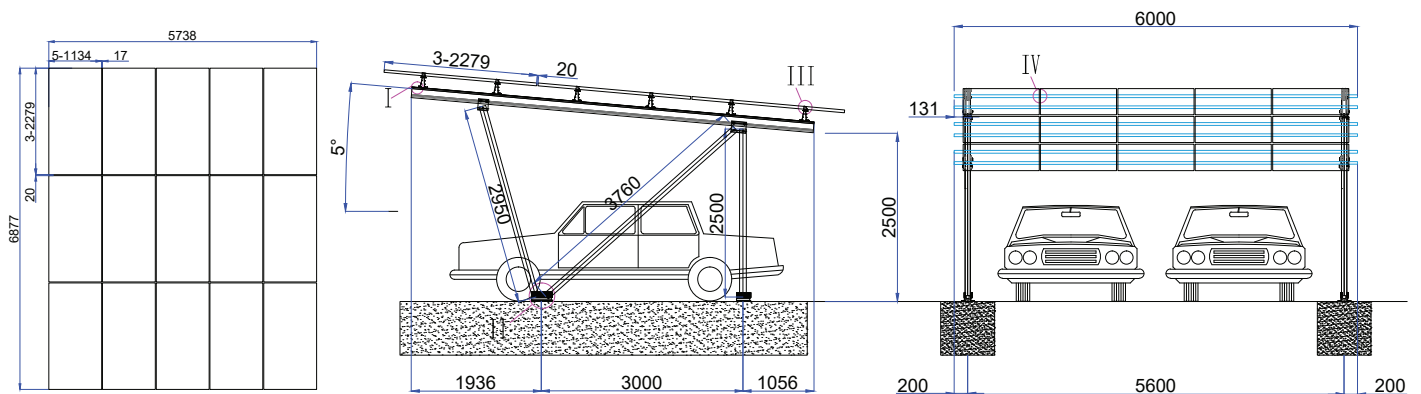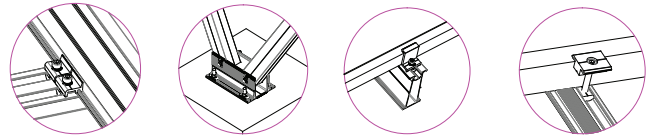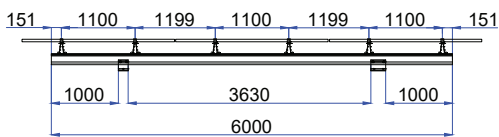

## SINGLE PHASE PHOTOVOLTAIC MICROINVERTER

# 300W

SKU-11724

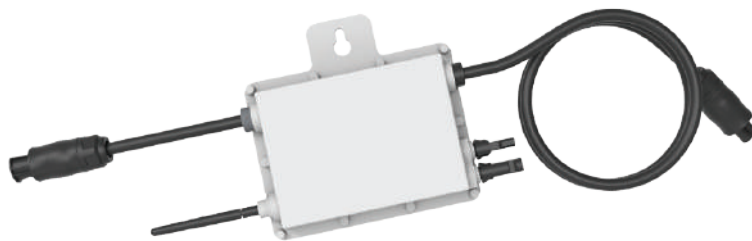


**10** YEAR WARRANTY

**CEI 0-21** CERTIFICATE

## SINGLE PHASE PHOTOVOLTAIC MICROINVERTER

# 600W

SKU-11614

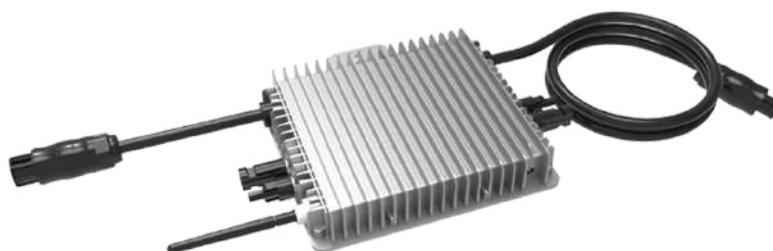

**IP67**  
Rating



**Zigbee or**  
WIFI communication



**Support reactive**  
power compensation



**1 MPP tracker,**  
module level monitoring




**Rapid shutdown**  
function

## 600W PORTABLE PV MICROINVERTER FOR BALCONY

SKU- 22000

- 6 pcs. - 100W FLEXIBLE PV PANEL (SKU 11568)
- 1 piece. - 600W MICRO INVERTER SINGLE PHASE (SKU 11614)
- 1 piece. - CABLE FOR MICRO INVERTER 5m (SKU 11739)
- 4 pcs. - EXTENSION CABLE-CONNECTOR 2.5m (SKU 11416)
- 25 pcs. - CABLE TIE 4.6\*250mm STEEL (SKU 11189)

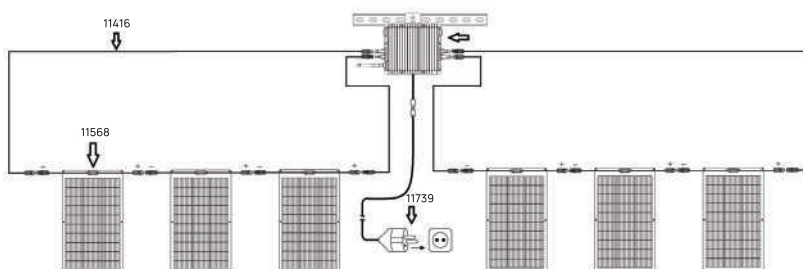

- ⊙ Attach to a fiat roof, terrace, balcony, fence and more other possibilities
- ⊙ Easy installation: connect, start save power
- ⊙ Light and compact microinverter
- ⊙ Suitable for submission to electricity to the household network 230V
- ⊙ Compliant with EN 50549, VDE, CEI 0-21

## SINGLE PHASE



**05** YEAR  
WARRANTY

## 3kW ON GRID SOLAR INVERTER WITH Wi-Fi DONGLE

| Power        | SKU   |
|--------------|-------|
| <b>3.6kW</b> | 11726 |

**CEI 0-21**

CERTIFICATE

|                     |  |
|---------------------|--|
| Inputs:             | PV Solar/AC Grid Power                             |
| Output Voltage:     | 220/230/240 Vac                                    |
| Max Power Input:    | 5400W  |
| Max V DC Input:     | 600V   |
| Max Current Input:  | 2x14A  |
| MPPTs:              | 2  |
| Strings per MPPT:   | 1  |
| MPPT Range:         | 70~550V  |
| Communication Mode: | CAN/RS485 / WiFi / Wire Ethernet / GPRS (optional) |

## SINGLE PHASE



**05** YEAR  
WARRANTY

## 5kW ON GRID SOLAR INVERTER WITH Wi-Fi DONGLE

| Power      | SKU   |
|------------|-------|
| <b>5kW</b> | 11820 |

**CEI 0-21**

CERTIFICATE

|                     |   |
|---------------------|---|
| Inputs:             | PV Solar/AC Grid Power                    |
| Output Voltage:     | 220/230 Vac                               |
| Max Power Input:    | 7000W                                     |
| Max V DC Input:     | 600V                                      |
| Max Current Input:  | 2x14A                                     |
| MPPTs:              | 2   |
| Strings per MPPT:   | 1   |
| MPPT Range:         | 180V ~ 600V                               |
| Communication Mode: | CAN/LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G |

## THREE PHASE



**10** YEAR  
WARRANTY

## 15kW ON GRID SOLAR INVERTER (XG SERIES)-THREE PHASE


| Power       | SKU   |
|-------------|-------|
| <b>15kW</b> | 11630 |

**CEI 0-21**

CERTIFICATE

|                     |                                      |
|---------------------|--------------------------------------|
| Inputs:             | PV Solar/AC Grid Power               |
| Output Voltage:     | 230Vac / 400Vac, 3L / N / PE         |
| Max Power Input:    | 24kW                                 |
| Max V DC Input:     | 1100V                                |
| Max Current Input:  | 32A                                  |
| MPPTs:              | 2                                    |
| Strings per MPPT:   | 2                                    |
| MPPT Range:         | 200~1000V                            |
| Communication Mode: | RS485 / WiFi / Usb / Ethernet / GPRS |

## SINGLE PHASE

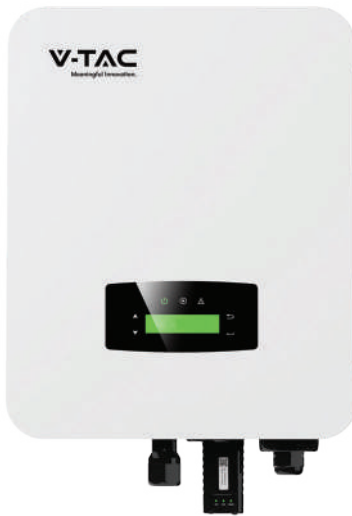

## 3.6kW ON/OFF GRID HYBRID SOLAR INVERTER

| Power        | SKU   |
|--------------|-------|
| <b>3.6kW</b> | 11576 |

**CEI 0-21**  
CERTIFICATE

Output Power: 3600W  
 Input Power(PV): 5400W  
 MPPT Efficiency: 98.1%  
 Battery Voltage Range (V): 40~60  
 Operation Temperature: -25°C to +60°C  
 Charging Current: 80A Max  
 Discharging Current : 80A Max

## SINGLE PHASE




## 3.6kW ON GRID SOLAR INVERTER-WITH WIFI- IP65

| Power        | SKU   |
|--------------|-------|
| <b>3.6kW</b> | 11726 |

**CEI 0-21**  
CERTIFICATE

Output Power: 3600W  
 Input Power(PV): 5400W  
 MPPT Efficiency: 98.20%  
 No.of MPP Trackers: 2  
 MPPT Operating Range (V): 130-550  
 Ingress Protection: IP65

## SINGLE PHASE

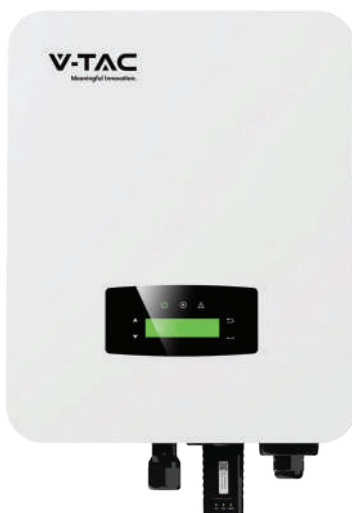

## 6kW ON/OFF GRID HYBRID SOLAR INVERTER

| Power      | SKU   |
|------------|-------|
| <b>6kW</b> | 11514 |

**CEI 0-21**  
CERTIFICATE

Output Power: 6000W  
 Input Power(PV): 9000W  
 MPPT Efficiency: 98.1%  
 Battery Voltage Range (V): 40~60  
 Operation Temperature: -25°C to +60°C  
 Charging Current: 80A Max  
 Discharging Current : 80A Max

## SINGLE PHASE



## 3.6kW ON/OFF GRID HYBRID SOLAR INVERTER


| Power        | SKU   |
|--------------|-------|
| <b>3.6kW</b> | 11725 |

**5+5**  
EXTENDED  
WARRANTY **YEAR**

**CEI 0-21**  
CERTIFICATE

Max. Input Power: 4680W  
 Rated AC Output and UPS Power: 3600W  
 Max. AC Output Power: 3960W  
 PV Input Current: 13A+13A  
 AC Output Rated Current: 16.4/15.7A  
 Max. AC Current: 18/17.2A  
 Max. Continuous AC Passthrough: 35A  
 PV Input Voltage: 370V (125V~500V)  
 MPPT Range: 150~425V  
 Full Load DC Voltage Range: 300~425V  
 Start-up Voltage: 125V  
 Battery Voltage Range(V): 40~60V

## THREE PHASE

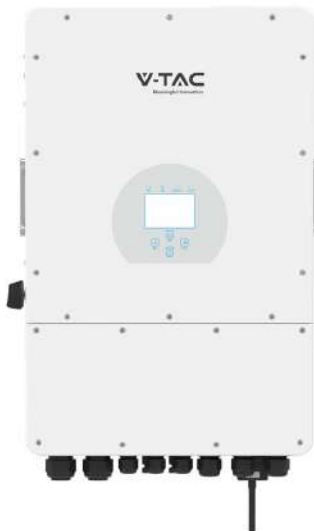

## 5kW ON/OFF GRID HYBRID SOLAR INVERTER


| Power      | SKU   |
|------------|-------|
| <b>5kW</b> | 11743 |

**5+5**  
EXTENDED  
WARRANTY **YEAR**

**CEI 0-21**  
CERTIFICATE

Max. Input Power: 6500W  
 Rated AC Output Active Power: 5000W  
 Max. AC Output Active Power: 5500W  
 PV Input Current: 13A+13A  
 AC Output Rated Current: 7.6/7.2A  
 Max. AC Output Current: 8.4/8A  
 Max. Three-phase Unbalanced Output Current: 11.4/10.9A  
 Max Output short circuit current: 75A  
 Max. Continuous AC Passthrough: 45A  
 Rated PV Input Voltage: 550 (160-800)  
 MPPT Range: 200-650V  
 Full Load DC Voltage Range: 350-650V  
 Start-up Voltage: 160V  
 Battery Voltage Range(V): 40~60V

## THREE PHASE

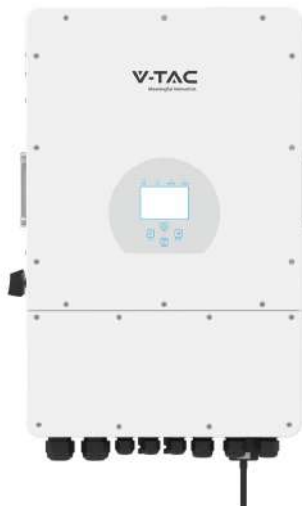

## 6kW ON/OFF GRID HYBRID SOLAR INVERTER

| Power      | SKU   |
|------------|-------|
| <b>6kW</b> | 11788 |

**5+5**  
EXTENDED  
WARRANTY **YEAR**

**CEI 0-21**  
CERTIFICATE

Max. Input Power: 7800W  
 Rated AC Output and UPS Power: 6000W  
 Max. AC Output Power: 6600W  
 PV Input Current: 13A+13A  
 AC Output Rated Current: 9.1/8.7A  
 Max. AC Output Current: 10/9.6A  
 Max. Three-phase Unbalanced Output Current: 13.6/13A  
 Max Output short circuit current: 75A  
 Max. Continuous AC Passthrough: 45A  
 Battery Voltage Range(V): 40~60V

**SINGLE PHASE**

**5kW HYBRID SOLAR INVERTER**



| Power      | SKU   |
|------------|-------|
| <b>5kW</b> | 11547 |

**05** YEAR WARRANTY

**CEI 0-21** CERTIFICATE

Output Power: 5000W  
 Input Power(PV): 6500W  
 MPPT Efficiency: 99.90%  
 Battery Voltage Range (V): 40~60  
 Operation Temperature : -40°C to +60°C  
 Charging Current : 120A Max  
 Discharging Current : 120A Max

**SINGLE PHASE**

**6kW ON/OFF GRID HYBRID SOLAR INVERTER**



| Power      | SKU   |
|------------|-------|
| <b>6kW</b> | 11537 |

| Power      | SKU                                |
|------------|------------------------------------|
| <b>6kW</b> | 11529 <b>ITALIAN SPECIFICATION</b> |

**05** YEAR WARRANTY

**CEI 0-21** CERTIFICATE

Output Power: 6000W  
 Input Power(PV): 7800W  
 MPPT Efficiency: 99.90%  
 Battery Voltage Range (V): 40~60  
 Operation Temperature : -40°C to +60°C  
 Charging Current : 135A Max  
 Discharging Current : 135A Max

**SINGLE PHASE**

**8kW HYBRID SOLAR INVERTER**



| Power      | SKU   |
|------------|-------|
| <b>8kW</b> | 11803 |


**05** YEAR WARRANTY

**CEI 0-21** CERTIFICATE

Output Power: 8000W  
 Input Power(PV): 10400W  
 MPPT Efficiency: 99.90%  
 Battery Voltage Range (V): 40~60  
 Operation Temperature : -40°C to +60°C  
 Charging Current : 190A Max  
 Discharging Current : 190A Max



## THREE PHASE

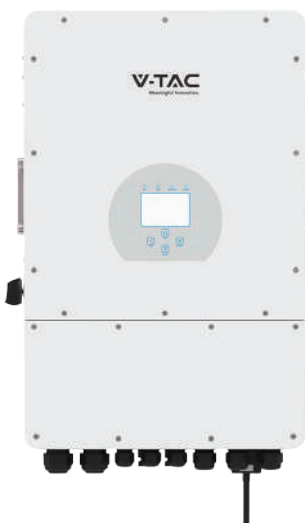

## 10kW HYBRID SOLAR INVERTER WITH TOUCH LCD DISPLAY


| Power       | SKU   |
|-------------|-------|
| <b>10kW</b> | 11542 |

**05** YEAR  
WARRANTY

**CEI 0-21**  
CERTIFICATE

Output Power: 11000W  
 Input Power(PV): 13000W  
 MPPT Efficiency: 99.90%  
 Battery Voltage Range (V): 40~60  
 Operation Temperature: -40°C to +60°C  
 Charging Current: 210A Max  
 Discharging Current : 210A Max

## THREE PHASE

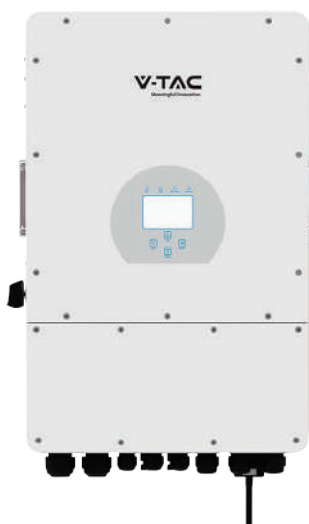

## 12kW HYBRID SOLAR INVERTER WITH TOUCH LCD DISPLAY

| Power       | SKU   |
|-------------|-------|
| <b>12kW</b> | 11543 |

**05** YEAR  
WARRANTY

**CEI 0-21**  
CERTIFICATE

Output Power: 12000W  
 Input Power(PV): 15600W  
 MPPT Efficiency: 99.90%  
 Battery Voltage Range (V): 40~60  
 Operation Temperature: -40°C to +60°C  
 Charging Current: 240A Max  
 Discharging Current : 240A Max

## THREE PHASE



## 30kW ON GRID SOLAR INVERTER

| Power       | SKU   |
|-------------|-------|
| <b>30kW</b> | 11812 |

**05** YEAR  
WARRANTY

**CEI 0-21**  
CERTIFICATE

Output Power: 30000W  
 Input Power(PV): 39000W  
 MPPT Efficiency: 99.90%  
 No.of MPP Trackers: 2  
 MPPT Operating Range (V): 200-850  
 Ingress Protection: IP65

Build your Full System with ONE BRAND!

**V-TAC**  
Meaningful Innovation.

**RESIDENTIAL**



**COMMERCIAL**



#### Sofia Office

V-TAC Europe Ltd  
41, bul. Rozhen  
1271 Sofia  
Bulgaria  
[www.v-tac.eu](http://www.v-tac.eu)  
[office@v-tac.eu](mailto:office@v-tac.eu)

#### UK Office

V-TAC House, Kelpatrick Road,  
Slough, Berkshire, SL1 6BW, UK.  
[www.v-tac.co.uk](http://www.v-tac.co.uk)  
[info@v-tac.co.uk](mailto:info@v-tac.co.uk)

#### Hungary Office

Népfürdő utca 13. | H-1138  
Budapest, Ungarn

#### Romania Office

Bulevardul Unirii, numărul 33  
(vis-a-vis de Institutul Bancar Român),  
București

#### Poland Office

V-TAC POLAND sp. z o.o.  
Ul. Obornicka 330  
60-689 Poznan

#### Middle East Office

Unit# 407/8/9 Jumeirah Bay Towers,  
Plot# X3, JLT,P.O. Box 45244, Dubai

#### V-TAC West Europe

Ground Floor, 71 Lower Baggot  
Street, Dublin 02, Ireland  
D02 P593

# V-TAC

Meaningful Innovation.

COMPLETE ENERGY SOLUTIONS FOR A BETTER TOMORROW